



WAAS CH 69405 W27A	APP CRS 271°	Rwy Idg 9000 TDZE 3852 Apt Elev 3877
--	------------------------	---

RNAV (GPS) X RWY 27
HELENA RGNL (HLN)

RNP APCH - GPS.  Circling NA to Rwy 10 and 28. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. Circling Rwy 5, 23, 35 NA at night. For Inop ALS, increase LPV all Cats visibility to 1% SM. Circling NA for Cat D south of Rwy 9-27.	MALSR 	MISSED APPROACH: Climb to 9400 direct EKIKE and on track 359° to WOKEN and hold.
--	---	---

ATIS 120.4	HELENA APP CON ★ 119.5 229.4	HELENA TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

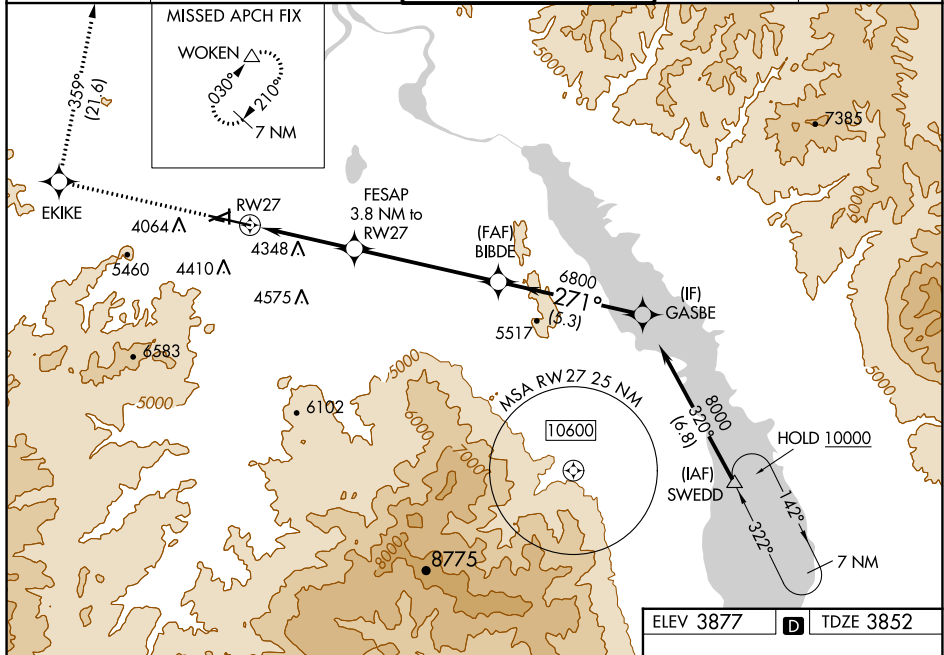

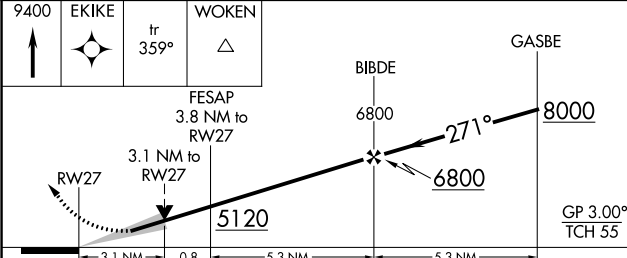9400 ↑	EKIKE ✦	tr 359°	WOKEN △				
FESAP 3.8 NM to RW27 3.1 NM to RW27 5120 6800 8000 GP 3.00° TCH 55							
CATEGORY		A	B		C	D	
LPV	DA	4501-1 $\frac{3}{8}$		649 (700-1 $\frac{3}{8}$)			
LNAV/ VNAV	DA	4724-2		872 (900-2)			
LNAV	MDA	4880- $\frac{3}{4}$ 1028 (1100- $\frac{3}{4}$)	4880-1 1028 (1100-1)	4880-2 $\frac{1}{2}$		1028 (1100-2 $\frac{1}{2}$)	
CIRCLING		4880-1 $\frac{1}{4}$ 1003 (1100-1 $\frac{1}{4}$)	4880-1 $\frac{1}{2}$ 1003 (1100-1 $\frac{1}{2}$)	6000-3		2123 (2200-3)	

