

LOC/DME I-MFR	APP CRS	Rwy Idg	8800
110.3	143°	TDZE	1303
Chan 40		Apt Elev	1335

ILS or LOC RWY 14

ROGUE VALLEY INTL-MEDFORD (MFR)

DME required. DME or RADAR required for procedure entry.

▼

▲

⊗


Circling NA for Cats C and D northeast of Rwy 14-32.
When Medford altimeter setting not received, procedure NA. For inop ALS, increase S-ILS 14 visibility to 1½ SM, increase S-LOC 14# Cats C and D visibility to RVR 5500, increase S-LOC 14 Cats C and D visibility to 2½ SM.

MALSR


⊗

MISSED APPROACH: Climb to 6600 on I-MFR SE course to JLOK/I-MFR 1.6 DME and climbing right turn on heading 350° and on OED VORTAC R-160 to OED VORTAC and hold, continue climb-in-hold to 6600.
#Missed approach requires minimum climb of 331 feet per NM to 4100.

ATIS	CASCADE APP CON★	MEDFORD TOWER★	GND CON	UNICOM
127.25	124.3 379.9	119.4 (CTAF) 1257.8	121.8	122.95

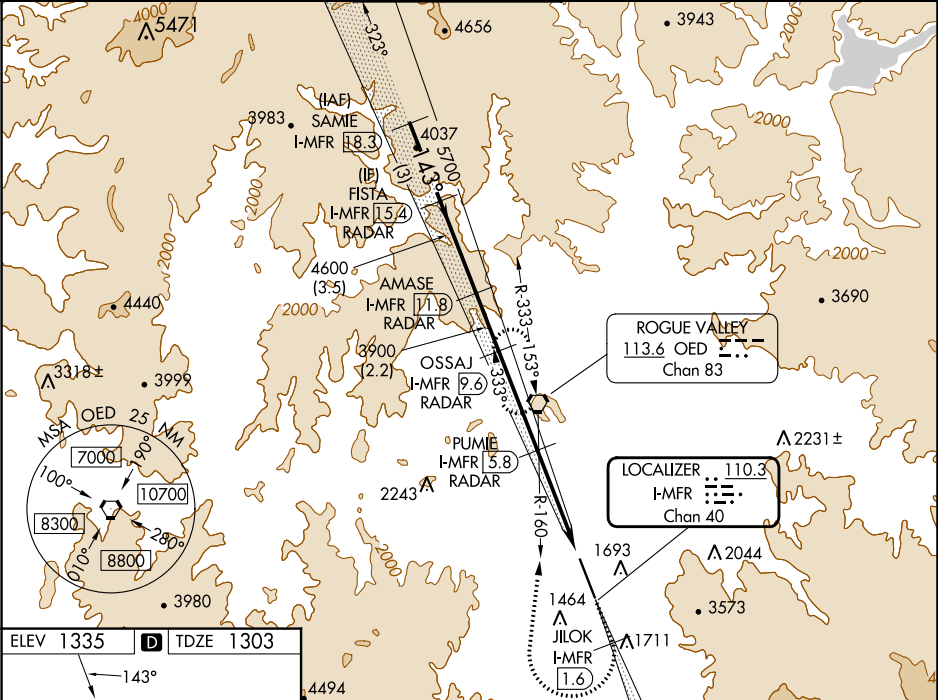

ELEV 1335	D	TDZE 1303
-----------	---	-----------

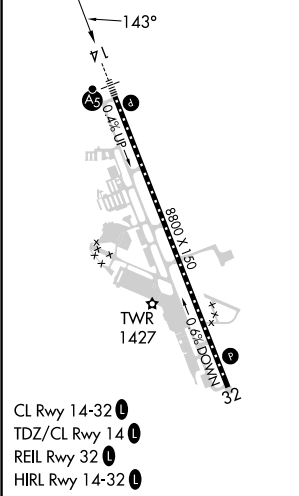

- CL Rwy 14-32
- TDZ/CL Rwy 14
- REIL Rwy 32
- HIRL Rwy 14-32

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).				
SAMI I-MFR 18.3 FISTA I-MFR 15.4 AMASE I-MFR 11.8 OSSAJ I-MFR 9.6 PUMIE I-MFR 5.8 JLOK I-MFR 1.6				
7000 5700 4600 3900 2660				
GS 3.00° TCH 58				
3 NM 3.5 NM 2.2 NM 3.8 NM 3.2 NM 1 NM				
CATEGORY	A	B	C	D
S-ILS 14#	1503/18		200 (200-½)	
S-ILS 14	1929-1¾		626 (600-1¾)	
S-LOC 14#	1680/24	377 (400-½)	1680/35	377 (400-¾)
S-LOC 14	2080/24	2080/40	2080-1¾	777 (800-1¾)
CIRCLING	2080-1	2080-1¼	2080-2½	2340-3
	745 (800-1)	745 (800-1¼)	745 (800-2½)	1005 (1100-3)