

WAAS

CH **86903**

W26A

APP CRS

272°

Rwy Idg

8600

TDZE

9

Apt Elev

9

RNAV (GPS) RWY 26R


MIAMI INTL (MIA)

RNP APCH - GPS.


Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
Use of FD or AP required during simultaneous operations.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.


D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CINC DEL	CPDLC
ARR 119.15	124.85 322.3	118.3 256.9	121.8 (Rwys 8L/R, 12, 26L/R)	348.6	
DEP 133.675			127.5 (Rwys 9, 27, 30)	135.35	

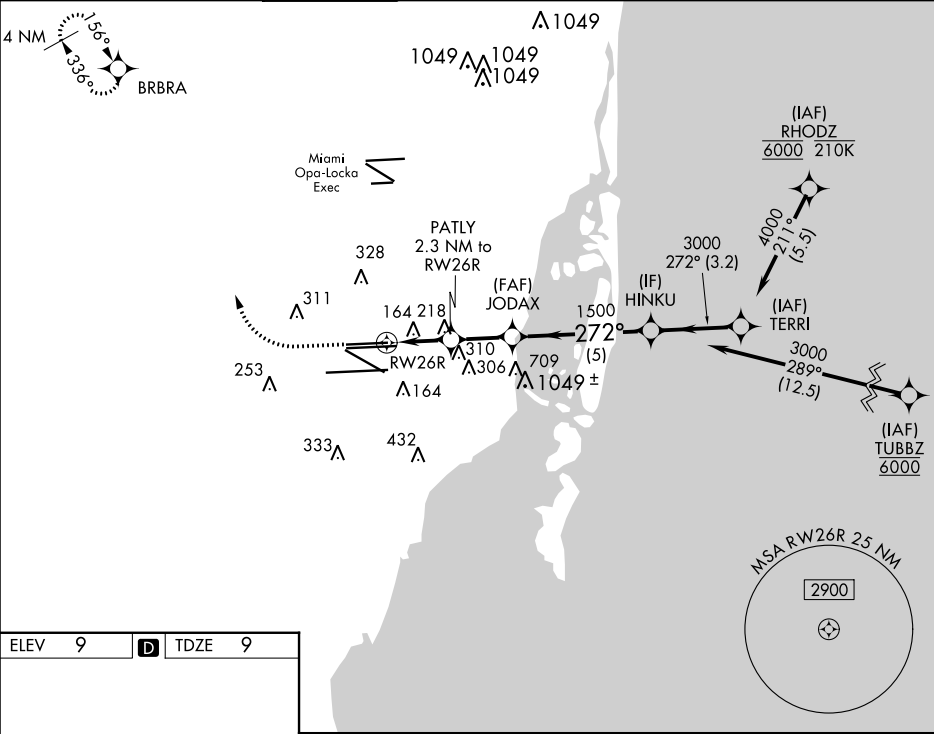

ELEV 9	D	TDZE 9
--------	----------	--------



TDZ/CL Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

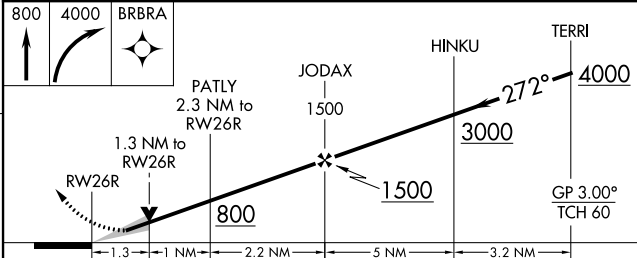800	4000	BRBRA				
						
						
CATEGORY	A	B	C	D		
LPV DA	265- $\frac{3}{4}$		256 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	432-1 $\frac{1}{4}$		423 (500-1 $\frac{1}{4}$)			
LNAV MDA	480-1	471 (500-1)	480-1 $\frac{3}{8}$ 471 (500-1 $\frac{3}{8}$)			