

WAAS CH 77924 W22A	APP CRS 223°	Rwy Idg 5764 TDZE 2630 Apt Elev 2634
--	------------------------	---

RNAV (GPS) RWY 22
FRANK WILEY FLD (MLS)

RNP APCH-GPS.


▼

▲

Baro-VNAV and VDP NA when using Glendive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3047 and all visibilities ½ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ¾ SM and Circling Cat C and D visibilities ½ SM.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

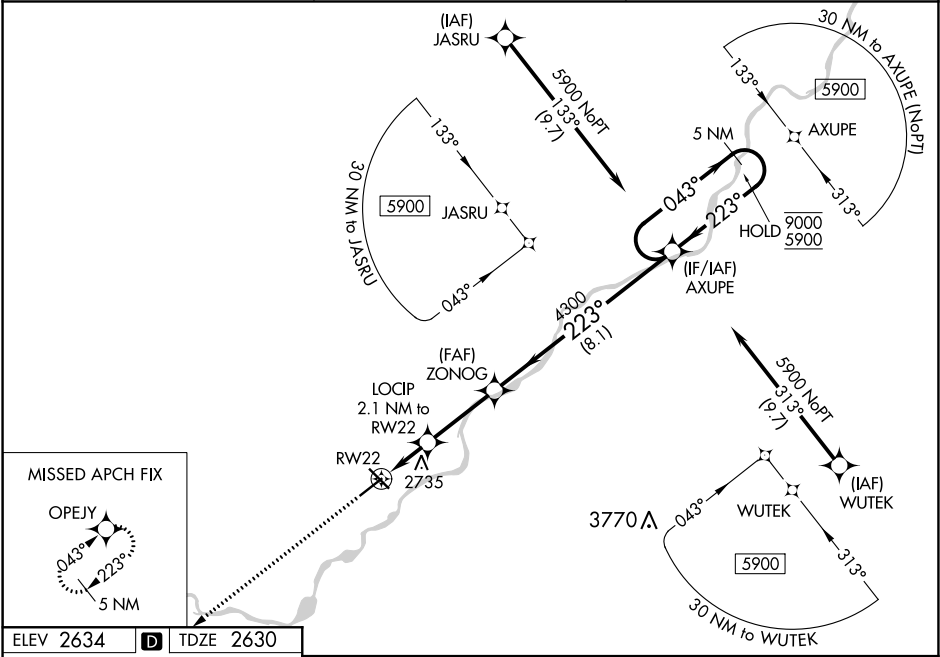

ELEV 2634

D

TDZE 2630

6000

OPEJY

223° to RW22

5764 X.75

5824 X.100

2684

LOCIP 2.1 NM to RW22

ZONOG 4300

AXUPE 4300

5 NM Holding Pattern

043° → 9000

← 223° 5900

GP 3.00°

TCH 41

CATEGORY	A	B	C	D
LPV DA		2880-1	250 (300-1)	
LNAV/VNAV DA		2880-1	250 (300-1)	
LNAV MDA		3000-1	370 (400-1)	
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)