

WAAS CH 62828 W14A	APP CRS 146°	Rwy Idg TDZE Apt Elev 705
--	------------------------	--

RNAV (GPS) RWY 14

ST PAUL DOWNTOWN HOLMAN FLD (STP)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Rwy 14 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV Cats C and D to 2½ SM.

MALSR

MISSED APPROACH:

(Do not exceed 250K until WHISK) Climb to 1700 then climbing left turn to 3000 direct WHISK and hold.

ATIS 118.35	MINNEAPOLIS APP CON 121.2 335.65	ST. PAUL TOWER ★ 119.1(CTAF) 0 257.8	GND CON 121.675	CLNC DEL 121.675	UNICOM 122.95
-----------------------	--	--	---------------------------	----------------------------	-------------------------

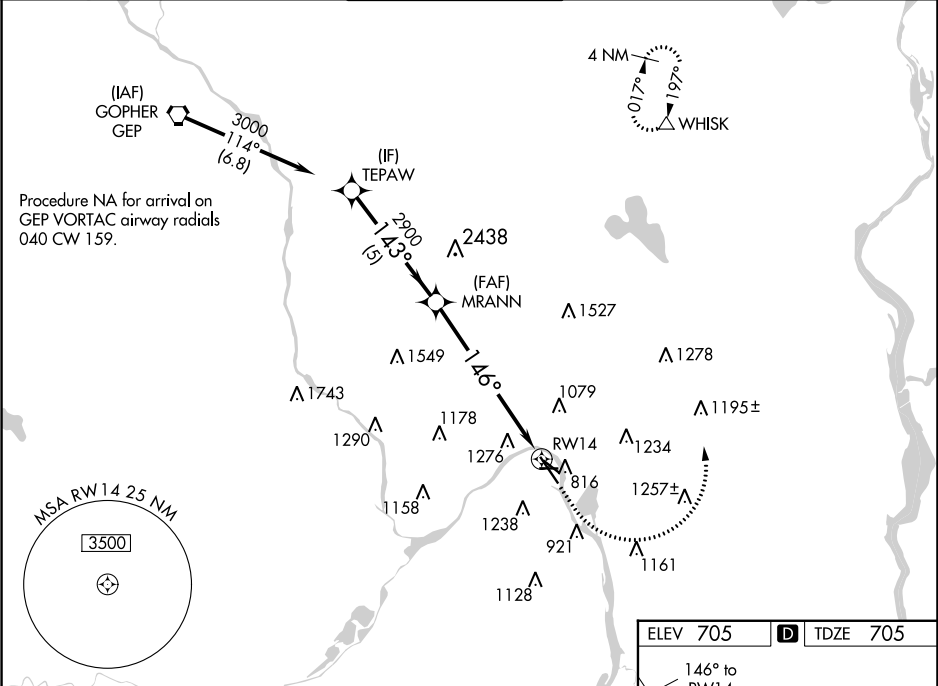

TEPAW		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).		1700	3000	WHISK
3000		2900		*LNAV only.		
GP 3.00°		TCH 42		* 2.4 NM to RWY 14		
5 NM		4.4 NM		RWY 14		
CATEGORY	A	B	C	D		
LPV DA	955/40		250 (300-¾)			
LNAV/VNAV DA	1511-2½		806 (900-2½)			
LNAV MDA	1520/40	815 (900-¾)	1520-1⅞	815 (900-1⅞)		
CIRCLING	1580-1¼	875 (900-1¼)	1580-2½	875 (900-2½)		

ELEV 705

D

TDZE 705

146° to RWY 14

4001 X 150

3642 X 100

8491 X 150

TWR

MIRL Rwy 9-27

REIL Rwy 31

REIL Rwy 32

HIRL Rlys 14-32 and 13-31