


ILS or LOC Z RWY 1L
NAPA COUNTY (APC)

- MALS
- 

MISSED APPROACH: Climb to 500 then climbing left turn to 3200 direct SGD VORTAC and on SGD VORTAC R-230 to BURDE INT/SGD 11.3 DME and hold, continue climb-in-hold to 3200.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.7	CLINC DEL 127.85	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	----------------------------	-------------------------

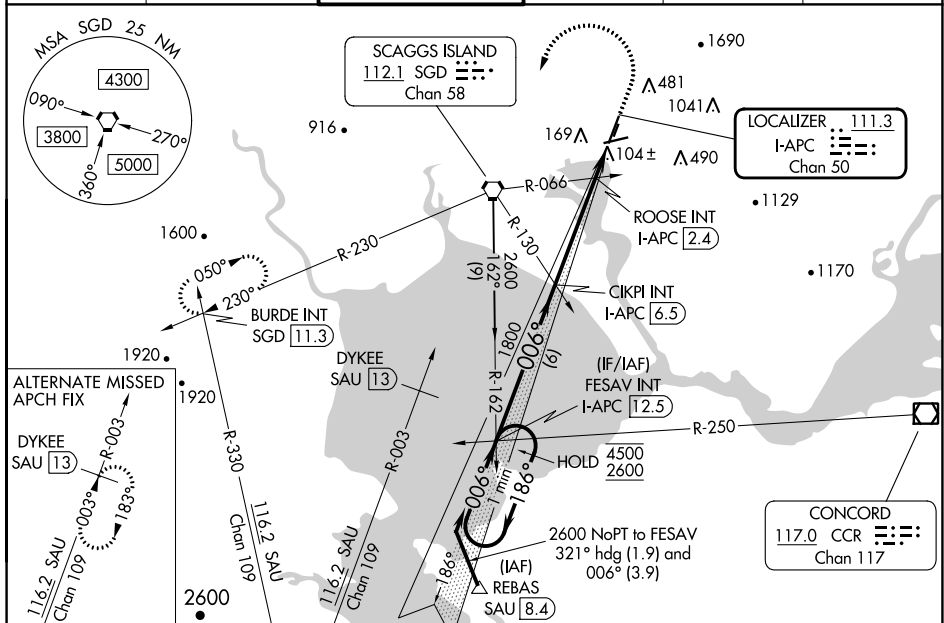

One Minute Holding Pattern

FESAV INT I-APC 12.5

CIKPI INT I-APC 6.5

ROOSE INT I-APC 2.4

I-APC 1.1

* LOC only

4500 ← 186°

2600 → 006°

006°

1800

*500

6 NM

4.1 NM

1.4 NM

GS 3.00°

TCH 50

CATEGORY	A	B	C	D
S-ILS 1L	217-3/4 200 (200-3/4)			
S-LOC 1L	500-3/4 483 (500-3/4)		500-1 1/8 483 (500-1 1/8)	
C CIRCLING	600-1 564 (600-1)	680-1 644 (700-1)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

ROOSE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)

S-LOC 1L	360-3/4 343 (400-3/4)
C CIRCLING	600-1 564 (600-1)

S-LOC 1L	680-1 644 (700-1)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)
C CIRCLING	600-1 564 (600-1)	680-1 644 (700-1)	1280-3 1244 (1300-3)

ELEV 36

TDZE 17

MIRL Rwy 6-24 and 1L-19R

REIL Rwy 6

0.3% UP

0.4% UP

0.4% UP

3920 X 130

2510 X 75

161

24

5008 X 150

TWR 110

006°

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SW-2, 16 MAY 2024 to 13 JUN 2024