


APP CRS	Rwy Idg	6502
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29


NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.		MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold.
T	Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C.	
NA	**Missed approach requires a minimum climb of 417 feet per NM to 800.	

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

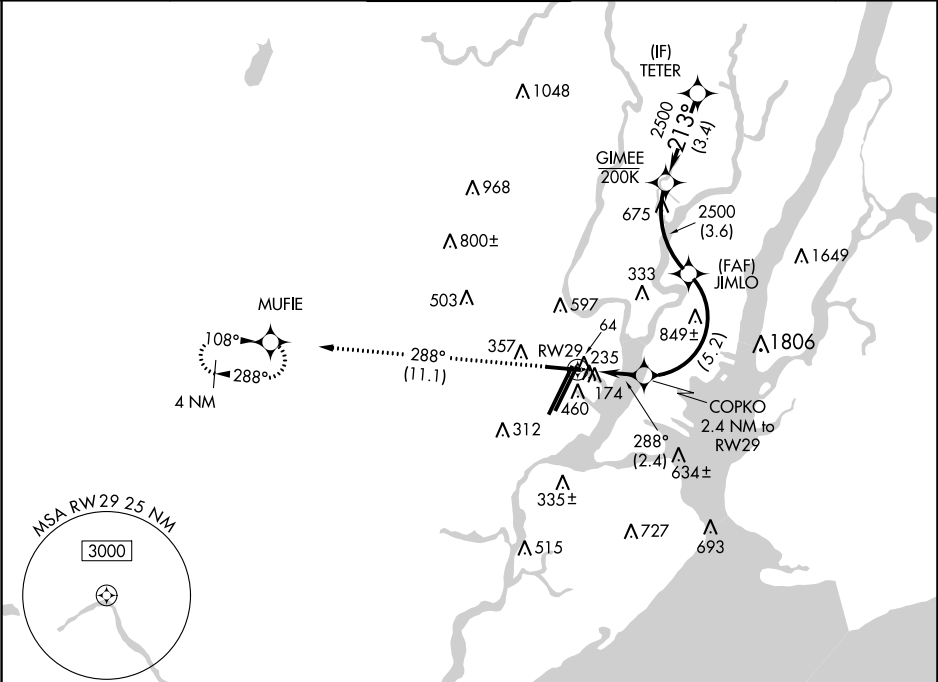

ELEV	18	TDZE	10
------	----	------	----

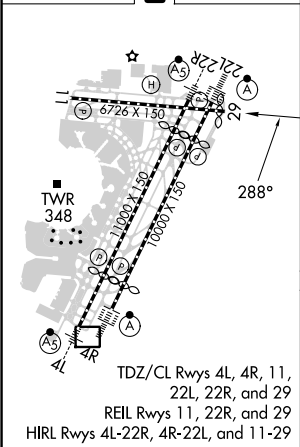

2000		MUFIE	
↑		tr 288°	
RWY 29		JIMLO	
288°		2500	
2.4		3.6	
5.2 NM		3.4 NM	
COPKO		TETER	
2.4 NM to RWY 29		3000	
834		GP 3.00°	
2500		TCH 60	
CATEGORY		D	
RNP 0.16 DA		461-1½ 451 (500-1½)	
RNP 0.30 DA		** 530-1¾ 520 (600-1¾)	
RNP 0.30 DA		573-1⅞ 563 (600-1⅞)	

AUTHORIZATION REQUIRED