



LOC I-TVC	APP CRS	Rwy Idg	7016
110.7	279°	TDZE	616
		Apt Elev	624


ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.	
Aircraft not GPS equipped - RADAR required for procedure entry.				
T A	S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 ½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.			
ATIS	MINNEAPOLIS CENTER	TRAVERSE CITY TOWER ★	GND CON	UNICOM
119.175	132.9 338.3	124.2 (CTAF) 0 348.6	121.8 348.6	122.95

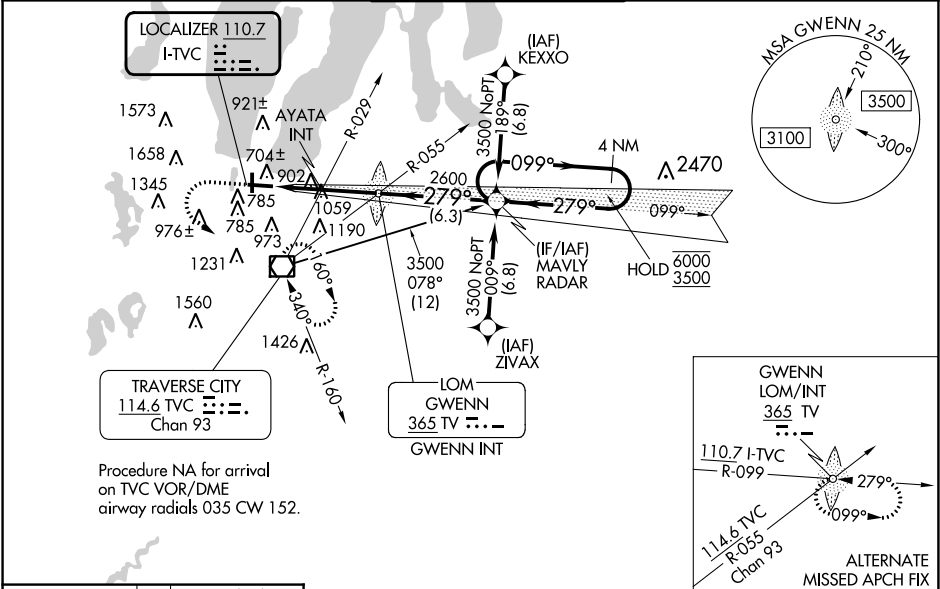

ELEV 624	D	TDZE 616
----------	---	----------

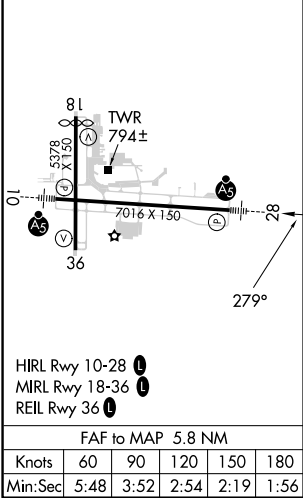

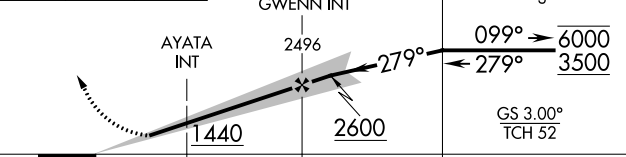1100 ↑		3000 		TVC 		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).			
						MAVLY RADAR		4 NM Holding Pattern	
CATEGORY		A		B		C		D	
S-ILS 28				816-½		200 (200-½)			
S-LOC 28		1440-½ 824 (900-½)		1440-¾ 824 (900-¾)		1440-1⅞		824 (900-1⅞)	
 CIRCLING		1440-1¼		816 (900-1¼)		1440-2½ 816 (900-2½)		1720-3 1096 (1100-3)	
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)									
S-LOC 28		1320-½		704 (700-½)		1320-1⅝		704 (700-1⅝)	
 CIRCLING		1320-1		696 (700-1)		1420-2¼ 796 (800-2¼)		1720-3 1096 (1100-3)	

EC-1, 16 MAY 2024 to 13 JUN 2024

EC-1, 16 MAY 2024 to 13 JUN 2024