

WAAS CH 49217 W01A	APP CRS 003°	Rwy Idg 5000 TDZE 372 Apt Elev 372
--	------------------------	---

RNAV (GPS) RWY 1

STURGIS MUNI (TWT)


▼

▲ NA

Baro-VNAV NA when using Henderson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Henderson altimeter setting and increase LPV DA to 708 and visibility all Cats to 1½ miles; increase LNAV/VNAV DA to 780 feet and visibility all Cats to 1¾ miles; increase all MDA 60 feet and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct
OLGEW and hold.

AWOS-3 118.775	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

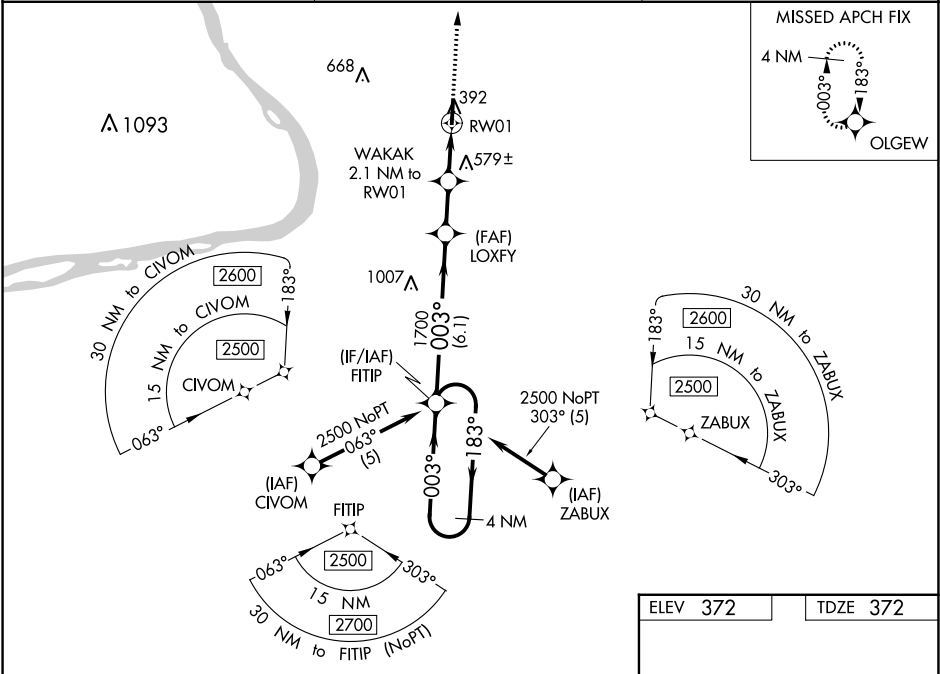

4 NM Holding Pattern				FITIP		LOXFY		WAKAK 2.1 NM to RW01		2500 ↑ OLGEW ✦	
2500 ← 183° 003° →				003°		1700		*1080		*LNAV only.	
GP 3.00° TCH 45				1700		6.1 NM		1.9 NM		2.1 NM	
CATEGORY				A		B		C		D	
LPV DA		658-7/8 286 (300-7/8)									
LNAV/ VNAV DA		730-1¼ 358 (400-1¼)									
LNAV MDA		820-1 448 (500-1)				820-1¾ 448 (500-1¾)					
CIRCLING		860-1 488 (500-1)		1000-1 628 (700-1)		1000-1¾ 628 (700-1¾)		1120-2½ 748 (800-2½)			

