
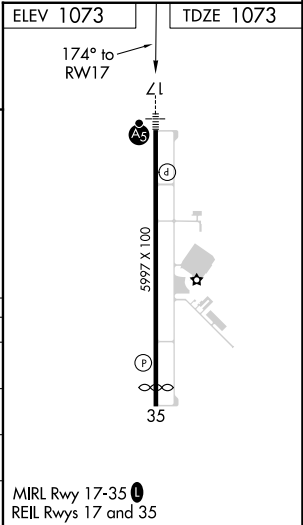
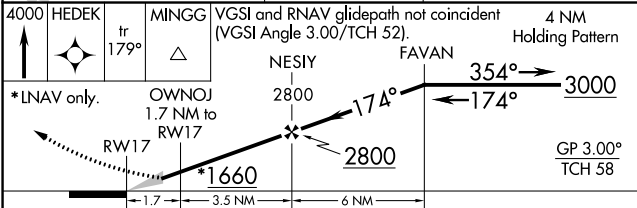


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>86919</b><br><b>W17A</b> | APP CRS<br><b>174°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5997</b><br><b>1073</b><br><b>1073</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 17  
SHAWNEE RGNL (SNL)

|                                                                                                                                                                                                                                                                                                                                                                                                         |           |                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------|
| <p>▼ Baro-VNAV NA when using Seminole altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).<br/>▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1313 feet; increase LNAV/VNAV DA to 1487 feet and visibility ¼ SM; increase all MDAs 40 feet and visibility Cat C ¼ SM.</p> | MALSR<br> | MISSED APPROACH: Climb to 4000 direct HEDEK and on track 179° to MINGG and hold. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------|

|                          |                                           |                               |
|--------------------------|-------------------------------------------|-------------------------------|
| AWOS-3<br><b>118.275</b> | OKE CITY APP CON<br><b>120.45 288.325</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|--------------------------|-------------------------------------------|-------------------------------|

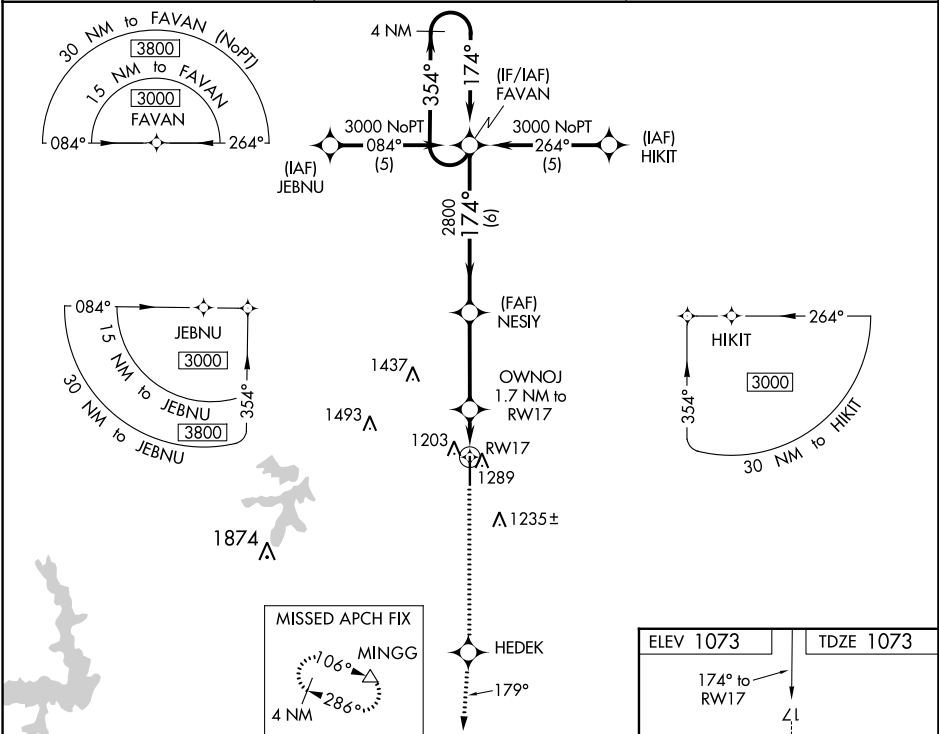

| CATEGORY     | A                  | B                    | C | D  |
|--------------|--------------------|----------------------|---|----|
| LPV DA       | 1273-½             | 200 (200-½)          |   | NA |
| LNAV/VNAV DA | 1447-¾             | 374 (400-¾)          |   | NA |
| LNAV MDA     | 1540-½ 467 (500-½) | 1540-¾ 467 (500-¾)   |   | NA |
| CIRCLING     | 1600-1 527 (600-1) | 1640-1½ 567 (600-1½) |   | NA |

SC-1, 16 MAY 2024 to 13 JUN 2024

SC-1, 16 MAY 2024 to 13 JUN 2024