

WAAS CH 72933 W32A	APP CRS 319°	Rwy Idg TDZE 1268 Apt Elev 1268
--	------------------------	---

RNAV (GPS) RWY 32

SPRINGFIELD-BRANSON NTL (SGT^F)


▼

▲


Baro-VNAV and VDP NA when using Monett altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Monett altimeter setting and increase all DA 90 feet and all MDA 100 feet; increase LPV all Cats visibility ⅓ mile, LNAV/VNAV all Cats ⅓ mile, LNAV Cats C and D ¼ mile and Circling Cat C ¼ mile and Cat D ½ mile. DME/DME RNP- 0.3 NA.

MISSED APPROACH:
Climb to 3000 direct JOGPU and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
------------------------	--	---	--------------------------------	----------------------------

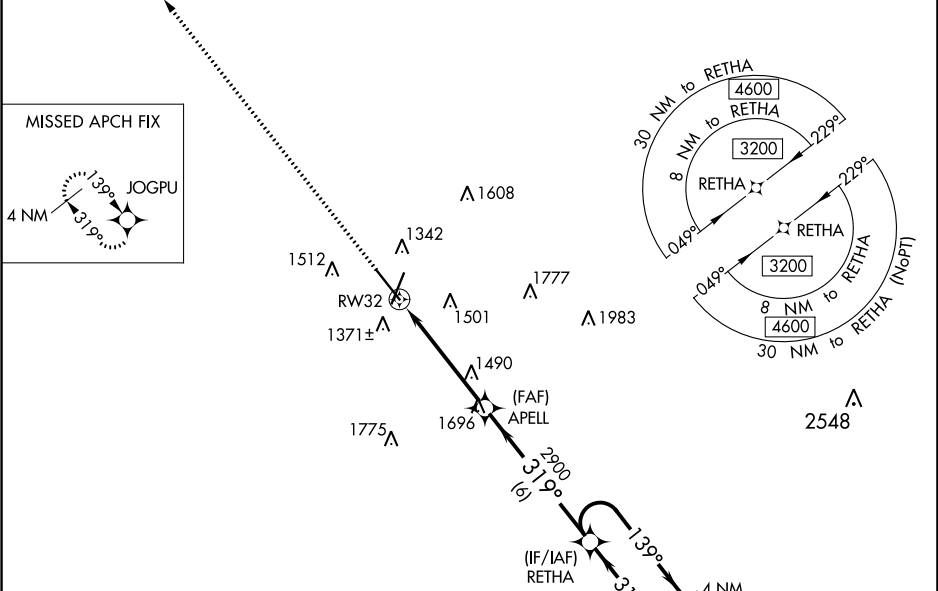

ELEV 1268	D	TDZE 1268
-----------	----------	-----------

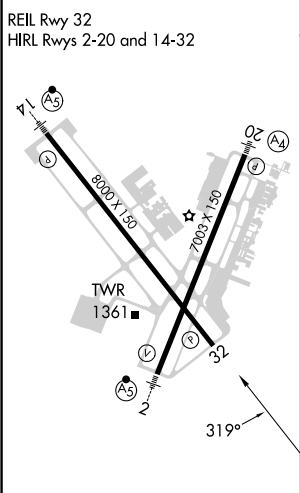

3000	JOGPU	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).	4 NM	Holding Pattern
*LNAV only. *1.4 NM to RW32				
CATEGORY	A	B	C	D
LPV	DA	1518-1	250 (300-1)	
LNAV/VNAV	DA	1660-1¼	392 (400-1¼)	
LNAV	MDA	1740-1	472 (500-1)	1740-1⅓ 472 (500-1⅓)
C CIRCLING	1760-1	1820-1	1820-1½	1920-2
	492 (500-1)	552 (600-1)	552 (600-1½)	652 (700-2)