

WAAS CH 87117 W26A	APP CRS 260°	Rwy Idg TDZE Apt Elev	9318 448 469
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 26

FORT SMITH RGNL (FSM)

RNP APCH - GPS

 Circling NA for Cat E northwest of Rwy 8 and 20. Circling Rwy 20, 26 NA at night.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.
 ASR Circling NA for Cat E NA when R-2401B active. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1% SM, and LNAV Cat E visibility to 1% SM.
 *RVR 1800 authorized with use of FD or AP or HD to DA.

MALSR



MISSED APPROACH.
Climb to 3000 direct
IXASY and hold.

ATIS 124.775	RAZORBACK APP CON ★ 120.9 343.75	FORT SMITH TOWER ★ 118.3(CTAF) 0 323.175	GND CON 121.9 275.8	CLNC DEL 133.85 278.3	UNICOM 122.95
-----------------	-------------------------------------	---	------------------------	--------------------------	------------------


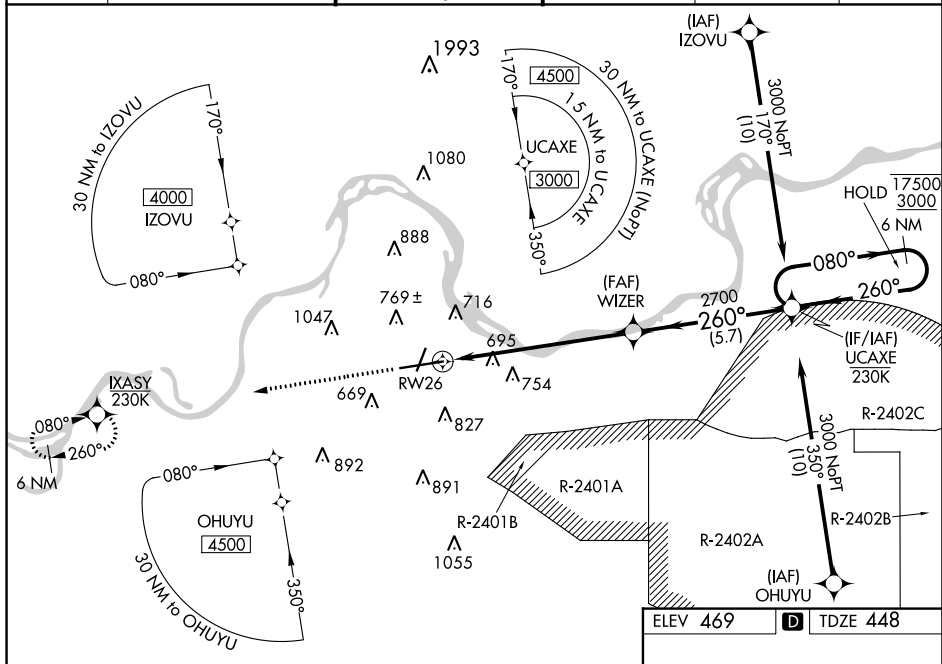


Diagram illustrating the RW26 holding pattern. The pattern is defined by a 1.6 NM radius. Key points include RW26, WIZER (2700), UCAXE, and the 6 NM Holding Pattern. The diagram also shows the 1.6 NM, 5.3 NM, and 5.7 NM segments. The GP 3.00° TCH 50 is indicated.

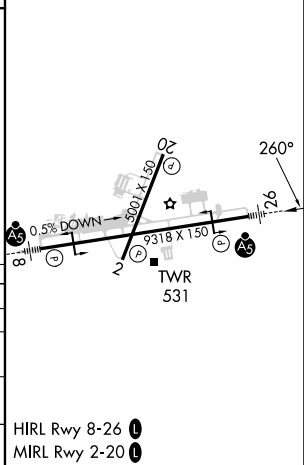

SC-1, 16 MAY 2024 to 13 JUN 2024