


RNAV (GPS) RWY 23

WAAS Chan 56203 W23A	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arprt Elev 571
--	-------------------------	---

[USA]

CAMPBELL AAF (KHOP)

RNP APCH - GPS			SSALR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct CHNUK and hold.				
▼ * When ALS inop, increase RVR to 40, vis to ¾ mile. ** When ALS inop, increase RVR to 55, vis to 1 mile. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE RVR to 60, vis to 1½ miles. **** Circling NA SE of Rwy 5-23.								
ATIS 125.175 308.4		APP CON 118.1 269.525		TOWER 120.9 278.8		GND CON 121.8 266.8	CLNC DEL 138.8	ASR/PAR

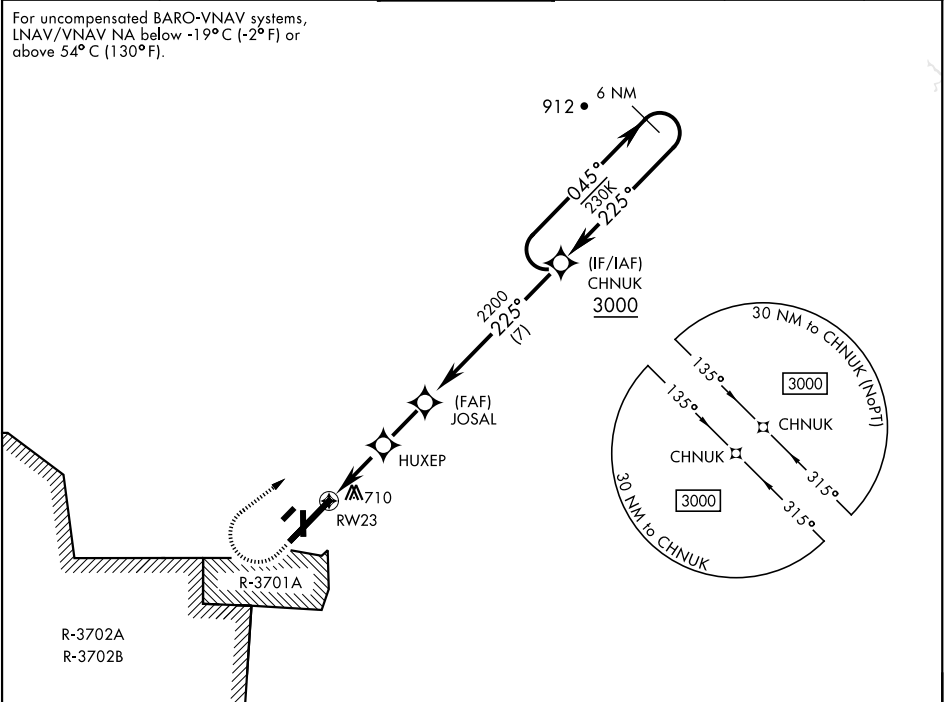

1000		3000		CHNUK		ELEV 571		TDZE 571	
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 78).						6 NM Holding Pattern			
CATEGORY						GP 3.00° TCH 57			
LPV DA *		771/24		200		(200-½)			
LNAV/VNAV DA **		949/35		378		(400-¾)			
LNAV MDA ***		960/24 389 (400-½)		960/35 389		(400-¾)			
CIRCLING ****		1060-1 489 (500-1)		1060-1½ 489 (500-1½)		1140-2 569		(600-2)	
HIRL all rwys									

RNAV (GPS) RWY 23