


WAAS CH 99611 W32A	APP CRS 323°	Rwy Idg TDZE Apt Elev	9001 1293 1297	RNAV (GPS) RWY 32 MANSFIELD LAHM RGNL (MFD)	
Baro-VNAV NA when using Marion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Marion altimeter setting and increase all DA 107 feet and all MDA 120 feet, LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D visibility ⅔ SM and Circling Cat C/D visibility ½ SM. For inop MALS when using Marion altimeter setting increase LPV all Cats visibility to 1. VDP NA with Marion altimeter setting. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Marion altimeter setting.				MALS	MISSED APPROACH: Climb to 3000 direct UPIYO and hold.
ATIS 125.3	CLEVELAND APP CON * 124.2 360.65	MANSFIELD TOWER * 119.8 (CTAF) 0291.775	GND CON 121.8 291.775	UNICOM 122.95	

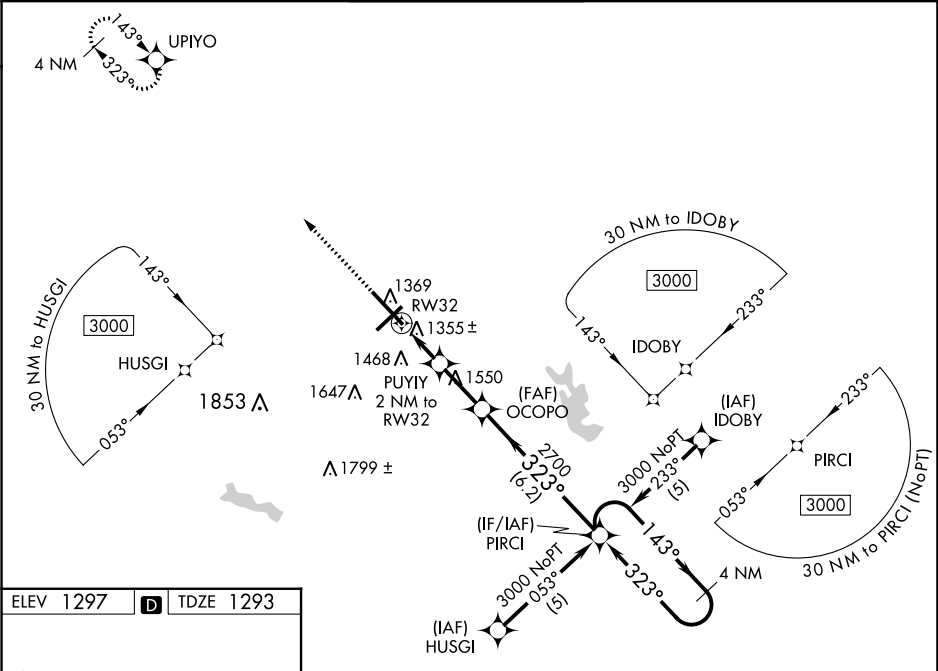

HIRL Rwy 5-23 and 14-32
REIL Rwy 5 and 23

3000 ↑ UPIYO ✦	PIRCI 4 NM Holding Pattern 143° ← 323° 3000		GP 3.00 TCH 46
*LNAV only 1 NM 1 NM 2.2 NM 6.2 NM PUIYO 2 NM to RW32 OCOPO 2700 *1960 2700 RW32 *1 NM to RW32			

			CATEGORY	A	B	C	D
LPV DA**	1493/24		200 (200-½)				
LNAV/VNAV DA	1789/60		496 (500-1¼)				
LNAV MDA	1660/24	367 (400-½)	1660/35	367 (400-⅝)			
C CIRCLING	1760-1	463 (500-1)	2000-2 703 (800-2)	2000-2¼ 703 (800-2¼)			