

SAN DIEGO, CALIFORNIA

23026

RNAV (GPS) RWY 24R

WAAS CH 61450 W24B	APCH CRS 243°	Rwy Idg 12,000 TDZE 475 Arpt Elev 477
--------------------------	------------------	---


AL-903 [USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

RNP APCH ▼ ** When ALS inop, increase vis to ¾ mile. *** When ALS inop, increase vis to 1 mile, CAT CD vis to 1¾ miles.			ALSF-1 	MISSED APPROACH: Climb to 3000 direct HOTIG, 288° track to REDIN and hold.		
ATIS ★ 352.0 133.475	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

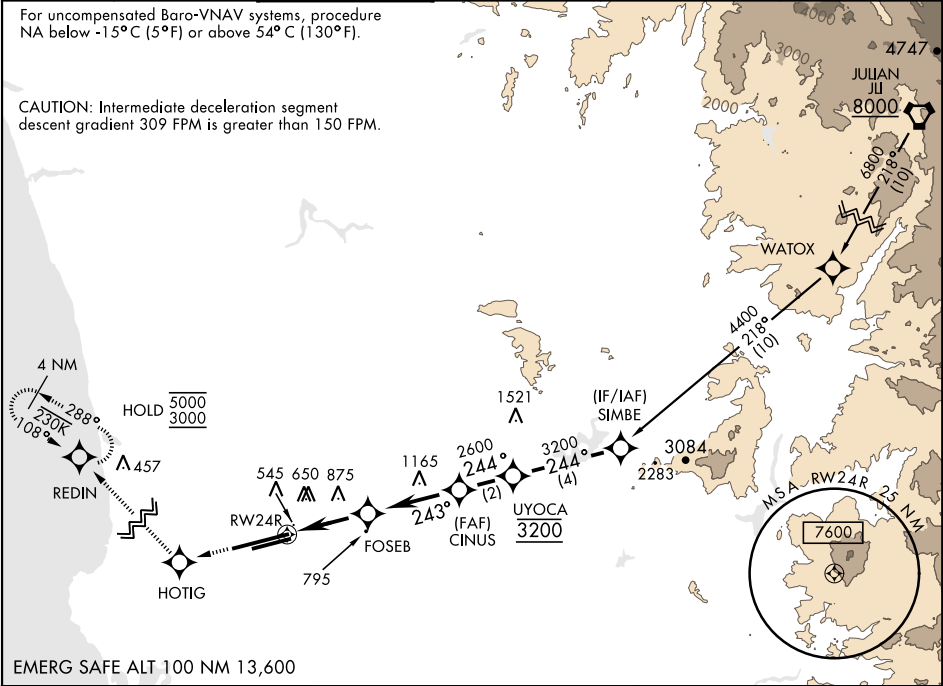

EMERG SAFE ALT 100 NM 13,600

3000 ↑		HOTIG ✦		REDIN ↗ tr 288°		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 57).		SIMBE		ELEV 477		TDZE 475	
CATEGORY		A		B		C		D					
LPV DA *		675-½		200		(200-½)							
LNNAV/VNAV DA **		725-½		250		(300-½)							
LNNAV ***		1060-½ 585 (600-½)		1060-1¼ 585 (600-1¼)									
CIRCLING		1060-1 583 (600-1)		1060-1¾ 583 (600-1¾)		1180-2¼ 703 (800-2¼)							

HIRL Rwy 6L-24R

HIRL Rwy 6R-24L

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amtdt 4 27JAN22

RNAV (GPS) RWY 24R

SW-3, 16 MAY 2024 to 13 JUN 2024

SW-3, 16 MAY 2024 to 13 JUN 2024