
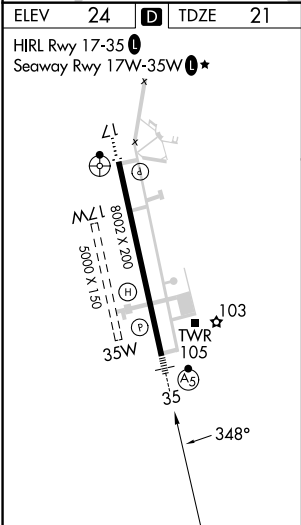


|                                                 |                        |                                                             |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|
| LOC/DME I-ARA<br><b>108.9</b><br>Chan <b>26</b> | APP CRS<br><b>348°</b> | Rwy Idg <b>8002</b><br>TDZE <b>21</b><br>Apt Elev <b>24</b> |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|

ILS or LOC RWY 35  
ACADIANA RGNL (ARA)

|                                                                                                                                       |                                          |                                                |                         |                          |                                                                                                                                  |                         |                    |
|---------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------|-------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------|
| DME required for procedure entry. DME required for LOC only.                                                                          |                                          |                                                | MALSR<br>               |                          | MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold. |                         |                    |
| Circling NA to Rwy 17W and 35W. For inop ALS increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cats C/D/E visibility to 1 ½ SM. |                                          |                                                |                         |                          |                                                                                                                                  |                         |                    |
| ASOS<br><b>133.325</b>                                                                                                                | LAFAYETTE APP CON★<br><b>121.1 268.7</b> | ACADIANA TOWER★<br><b>125.0 (CTAF) 0 239.3</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>121.7</b> | CLNC DEL<br><b>118.05</b><br>(when twr closed)                                                                                   | UNICOM<br><b>122.95</b> | 0★<br><b>122.7</b> |

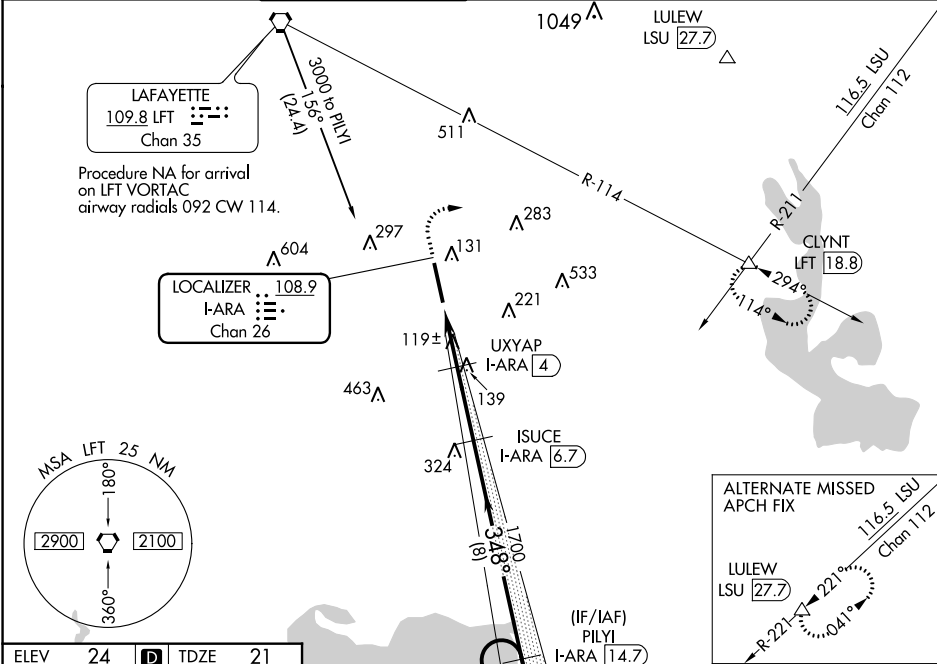

|                         |                                     |                   |                     |                   |                   |                            |
|-------------------------|-------------------------------------|-------------------|---------------------|-------------------|-------------------|----------------------------|
| 800                     | 2000                                | LFT R-114         | CLYNT               | ISUCE I-ARA 6.7   | PLYI I-ARA 14.7   | One Minute Holding Pattern |
| hdg 080°                |                                     |                   |                     |                   |                   |                            |
| *LOC only.              |                                     |                   |                     |                   |                   |                            |
| I-ARA 1.6               | I-ARA 2.6                           | UXYAP I-ARA 4     | 1700                | 348°              | 168°              | 4500 2000                  |
| 480° 1700               |                                     |                   |                     |                   |                   |                            |
| GS 3.00° TCH 51         |                                     |                   |                     |                   |                   |                            |
| 1 NM 1.4 NM 2.7 NM 8 NM |                                     |                   |                     |                   |                   |                            |
| CATEGORY                | A                                   | B                 | C                   | D                 | E                 |                            |
| S-ILS 35                | 221-½ 200 (200-½)                   |                   |                     |                   |                   |                            |
| S-LOC 35                | 440-½ 419 (500-½) 440-¾ 419 (500-¾) |                   |                     |                   |                   |                            |
| CIRCLING                | 440-1 416 (500-1)                   | 480-1 456 (500-1) | 600-1½ 576 (600-1½) | 680-2 656 (700-2) | 900-3 876 (900-3) |                            |