

LOC I-DPA 109.5	APP CRS 097°	Rwy Idg 4750 TDZE 756 Apt Elev 759
---------------------------	------------------------	---

ILS or LOC RWY 10


DUPAGE (DPA)

⚠

When local altimeter setting not received, use Chicago/Aurora altimeter setting: increase S-ILS 10 DA to 993 feet; increase all MDA 40 feet and visibility S-LOC 10 Cats C/D and HOVUB INT minimums S-LOC 10 Cats C/D ½ SM, and Circling and HOVUB INT minimums Circling Cats C/D ¼ SM. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2600 direct JOT VOR/DME and hold.

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8	CLNC DEL 119.75
------------------------	---------------------------------------	------------------------------------	-------------------------	---------------------------

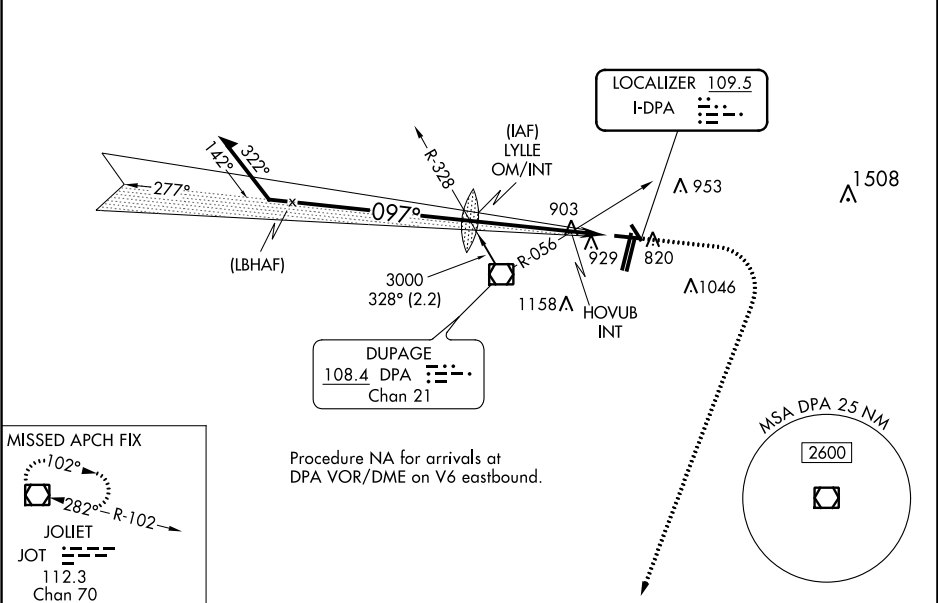

Remain within 10 NM				ELEV 759		TDZE 756	
* LOC only. * 1340 when using Chicago/ Aurora altimeter setting.							
CATEGORY	A	B	C	D			
S-ILS 10	956-¾		200 (200-¾)				
S-LOC 10	1300-1 544 (600-1)		1300-1½ 544 (600-1½)				
CIRCLING	1300-1 541 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)			
HOVUB INT MINIMUMS (DUAL VOR RECEIVERS REQUIRED)							
S-LOC 10	1220-1 464 (500-1)		1220-1¾ 464 (500-1¾)				
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)			
					FAF to MAP 5.3 NM		
					Knots	60 90 120 150 180	
					Min:Sec	5:18 3:32 2:39 2:07 1:46	