



LOC/DME I-GVT 110.5 Chan 42	APP CRS 176°	Rwy Idg TDZE 534 Apt Elev 535	ILS Y or LOC Y RWY 17 MAJORS (GVT)	
---	------------------------	---	---------------------------------------	--

DME required. Inop table does not apply to S-ILS 17 all Cats and S-LOC 17 Cats A/B. For inop ALS, increase S-LOC 17 Cat E visibility to 1½ SM. Autopilot coupled approach NA below 900 feet.			MALS 	MISSED APPROACH: Climbing right turn to 3000 on MUF TACAN R-186 to CAJAN/MUF TACAN 15 DME and hold.
AWOS-3 133.425	FORT WORTH CENTER 132.025 360.75	MAJORS TOWER ★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95

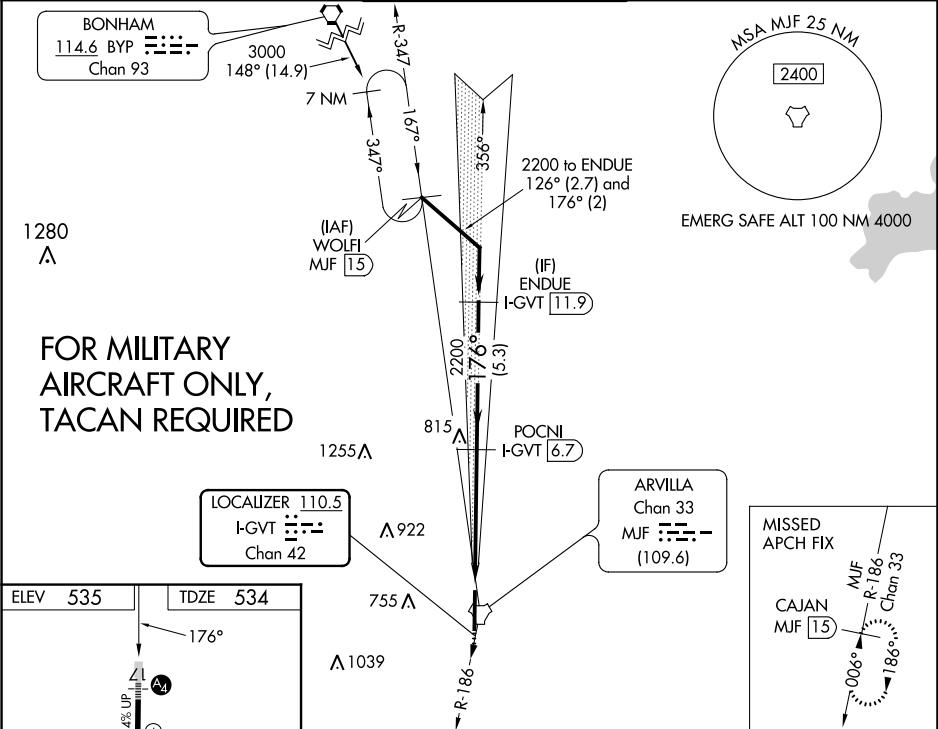

FOR MILITARY
AIRCRAFT ONLY,
TACAN REQUIRED

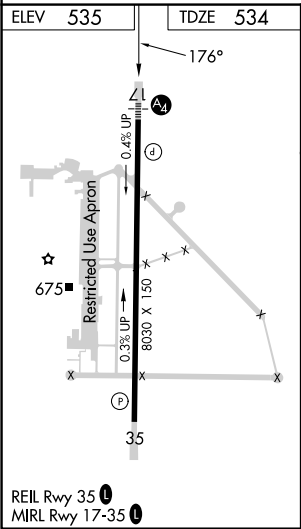

3000 MUF R-186		CAJAN MUF 15	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 74).	
POCNI I-GVT 6.7		ENDUE I-GVT 11.9	Use I-GVT DME when on localizer course.	
I-GVT 1.6		I-GVT 3	2200 176° 2200	
1.5 NM		3.6 NM	5.3 NM	
CATEGORY	A	B	C	E
S-ILS 17	734-1		200 (200-1)	
S-LOC 17	1060-1	526 (600-1)	1060-1¼ 526 (600-1¼)	
CIRCLING	1060-1	525 (600-1)	1060-1½ 525 (600-1½)	1240-2¼ 1300-2¾