

WAAS CH 62821 W10A	APP CRS 101°	Rwy Idg 4501 TDZE 1237 Apt Elev 1253
--	------------------------	---

RNAV (GPS) RWY 10
BEAVER COUNTY (BVI)

BEAVER COUNTY (BVI)


RNP APCH.

Baro-VNAV and VDP NA when using Pittsburgh Inrl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). When local altimeter setting not received, use Pittsburgh Inrl altimeter setting; increase all DA 50 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM.

Circling Rwy 28 NA at night. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct JEDUV and hold.

ATIS 118.35	PITTSBURGH APP CON 124.75 338.2	BEAVER COUNTY TOWER* 120.3 (CTAF) 0	GND CON 121.8	CLNC DEL 124.85 (when twr closed)
-----------------------	---	--	-------------------------	--

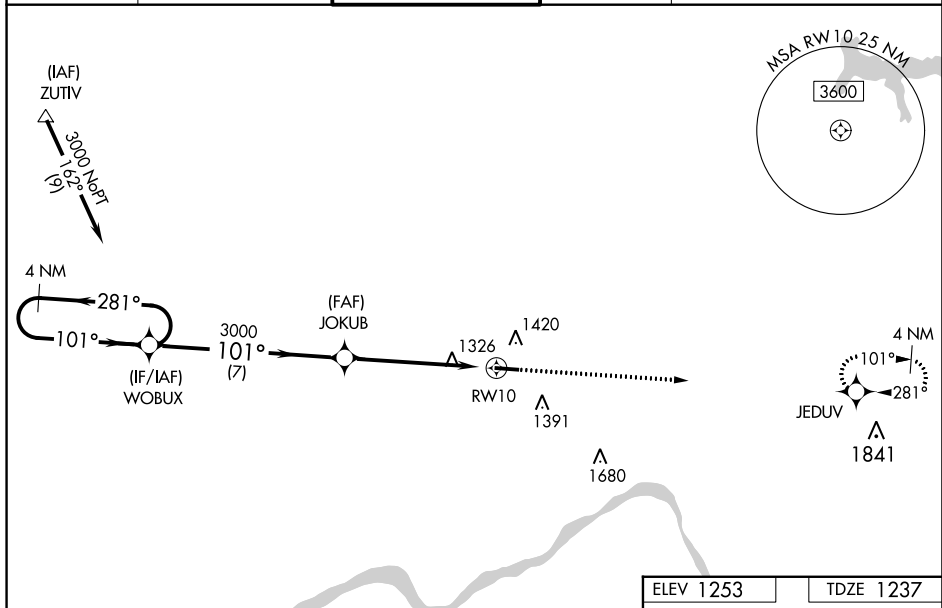

NE-4, 16 MAY 2024 to 13 JUN 2024

4 NM Holding Pattern

WOBUX

JOKUB

3000

281°

101°

101°

GP 3.00° TCH 55

7 NM

4.4 NM

1.1 NM

RW10

* 1.1 NM to RW 10

3000 JEDUV

* LNAV only.

101°

1.1% UP

4501 X 100

CATEGORY	A	B	C	D
LPV DA	1528-1	290 (300-1)		
LNAV/VNAV DA	1514-1	276 (300-1)		
LNAV MDA	1580-1	342 (400-1)		
CIRCLING	1720-1 467 (500-1)	1720-1½ 467 (500-1½)	1820-2 567 (600-2)	

MIRL Rwy 10-28
REIL Rwy 10 and 28