

WAAS CH 87130 W35A	APP CRS 353°	Rwy Idg 5501 TDZE 580 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 35
MC GREGOR EXEC (PWG)

RNP APCH - GPS.


T Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.


AWOS-3PT 135.525	WACO APP CON ★ 127.65 352.0	GCO 121.725	UNICOM 122.8 (CTAF) U
----------------------------	---------------------------------------	-----------------------	--

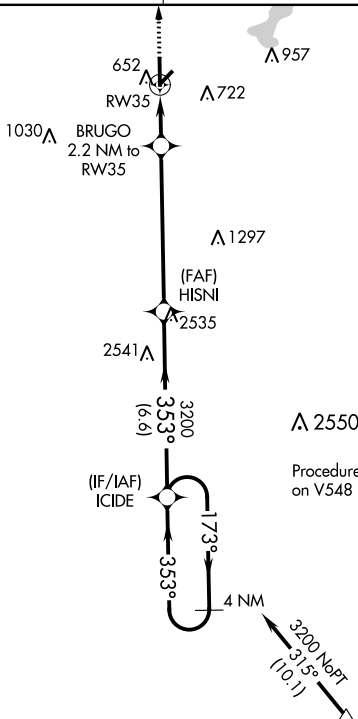

Procedure NA for arrivals at BARBA on V548 southbound.



ELEV 592		TDZE 580
----------	--	----------

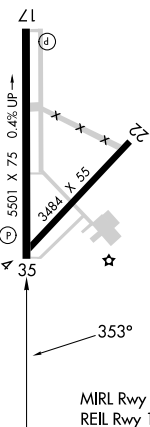

2500	BLDEE	ACT	HISNI		ICIDE	4 NM Holding Pattern
		tr 018° 	3200			
BRUGO 2.2 NM to RW35			3200	353°	173°	3200
			3200	353°		
1300						GP 3.00° TCH 46
2.2 NM		5.9 NM		6.6 NM		
CATEGORY	A	B		C		D
LPV DA	830-3 ⁴ / ₄		250 (300-3 ⁴ / ₄)		NA	
LNAV/ VNAV	830-3 ⁴ / ₄		250 (300-3 ⁴ / ₄)		NA	
LNAB MDA	960-1 380 (400-1)		960-1 ¹ / ₈ 380 (400-1 ¹ / ₈)		NA	
CIRCLING	1020-1 428 (500-1)	1060-1 468 (500-1)		1300-2 708 (800-2)		NA