
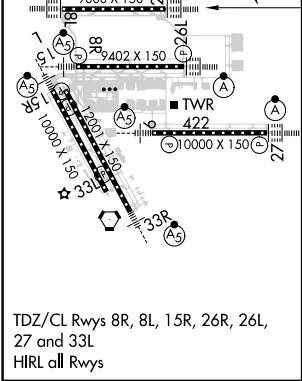


APP CRS	Rwy Idg	9000
267°	TDZE	96
	Apt Elev	96

RNAV (RNP) Y RWY 26R
GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cnts visibility to RVR 5000 and increase RNP 0.15 all Cnts visibility to 1½ SM. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	ALS-F-2 Ⓐ	MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.
--	-------------------------	--

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 120.72 290.2	GND CON 121.7	CLNC DEL 128.1	CPDLC
------------------	--	-------------------------------	------------------	-------------------	-------

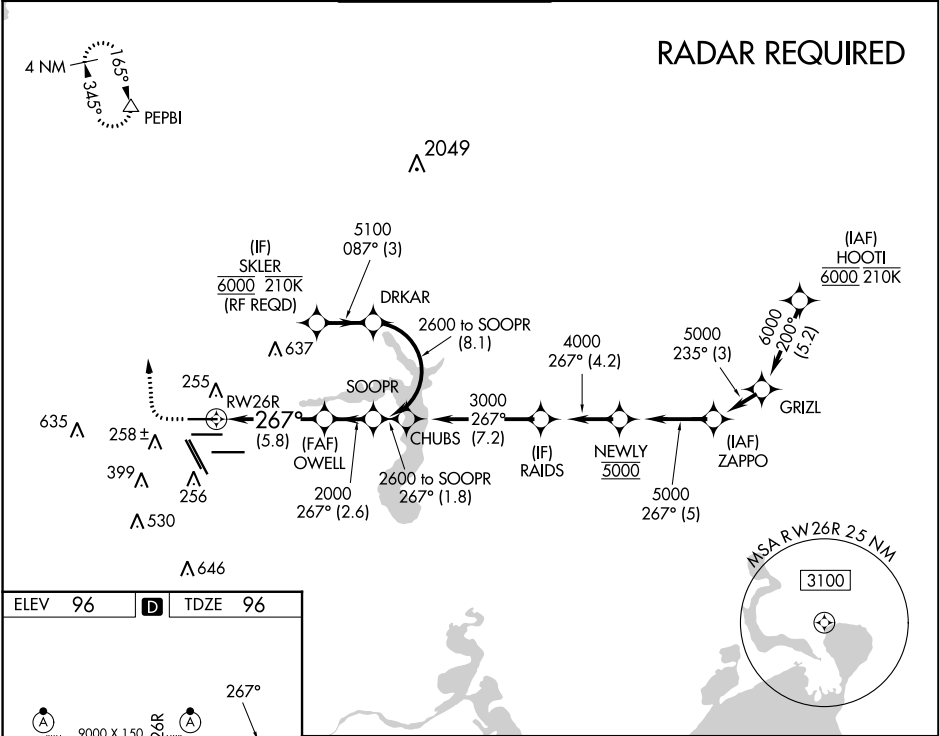

600	3000	PEPBI	See planview for multiple IF locations.	
↑	↷	△		