

WAAS
CH **86712**
W13A


APP CRS
125°

Rwy Idg
TDZE **2119**
Apt Elev **2120**

RNAV (GPS) RWY 13

VIRGINIA TECH/MONTGOMERY EXEC (BCB)

RNP APCH. Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A and B.		ODALS 	MISSED APPROACH: Climb to 5400 direct ZASNO and hold, continue climb-in-hold to 5400.
AWOS-3 133.325	ROANOKE APP CON 126.9 339.8	CLNC DEL 124.85	UNICOM 123.05 (CTAF) 0

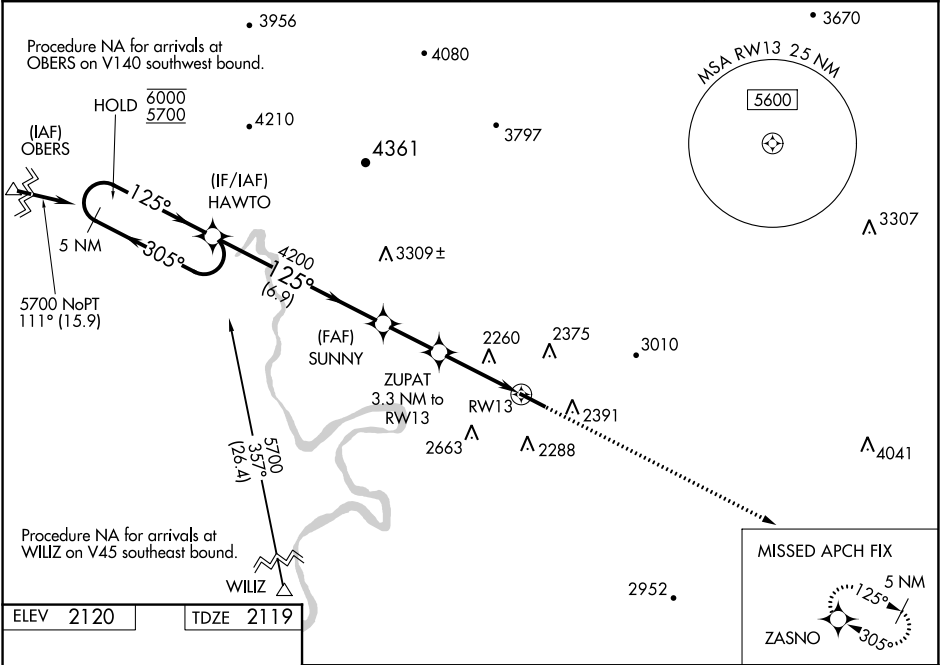

125°

5 NM Holding Pattern

305°

125°

125°

5501 X 100

2239±

31

REIL Rwy 31

MIRL Rwy 13-31

5 NM Holding Pattern HAWTO

305°

125°

125°

5501 X 100

2239±

31

REIL Rwy 31

MIRL Rwy 13-31

SUNNY

ZUPAT

RW13

GP 3.44° TCH 55

6.9 NM

2.2 NM

2.4

0.9

5400

ZASNO

*LNAV only

CATEGORY	A	B	C	D
LPV DA	2389-1	270 (300-1)		NA
LNAV/VNAV DA	2419-1	300 (300-1)		NA
LNAV MDA	2520-1	401 (400-1)		NA
CIRCLING	2760-1 640 (700-1)	2820-1 700 (700-1)	2980-2½ 860 (900-2½)	NA