

WAAS CH 70743 W24A	APP CRS 235°	Rwy Idg TDZE Apt Elev	3693 435 435
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 24
NEW GARDEN (N57)

RNP APCH:


▼
▲ NA Rwy 24 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when local altimeter not received, use New Castle altimeter setting and increase all MDA 80 feet. Increase LP Cat C visibility 3⁄8 SM, LNAV Cat C visibility 1⁄4 SM and Circling Cat C visibility 1⁄4 SM.

MISSED APPROACH: Climb to 2200 direct DELFA and hold.

PHILADELPHIA APP CON 124.35 319.15	CLNC DEL 125.6	UNICOM 123.05 (CTAF) 0
--	--------------------------	----------------------------------

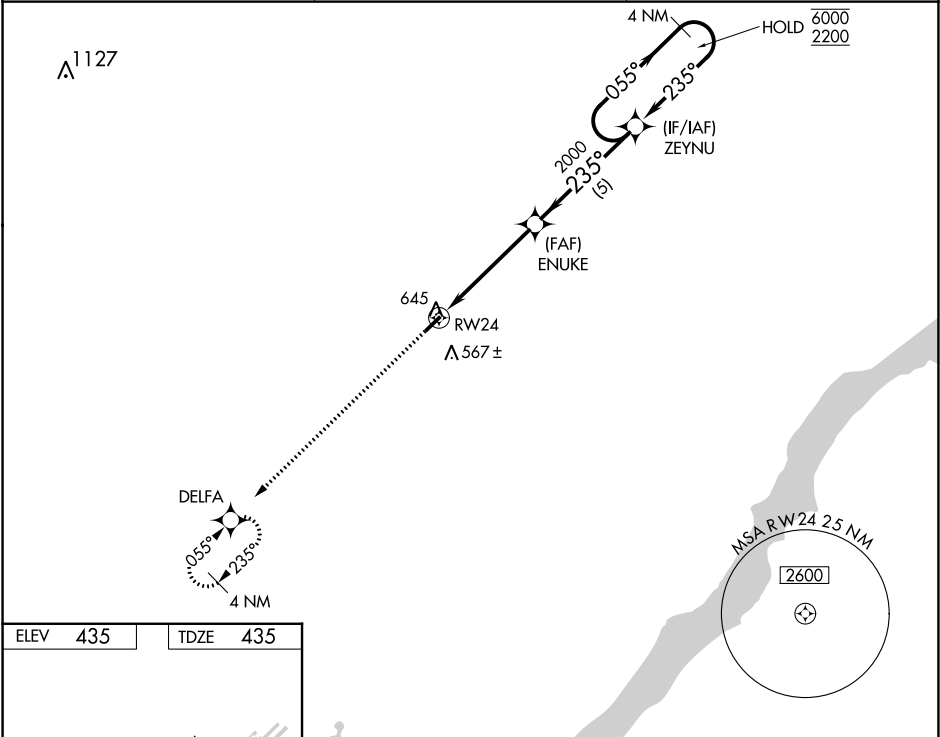

ELEV 435	TDZE 435
----------	----------

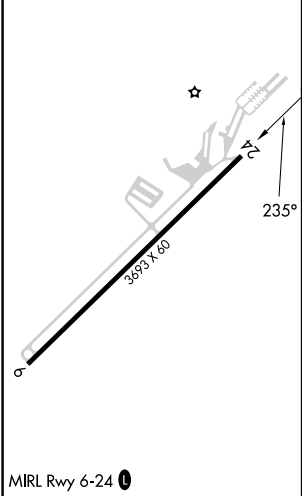

2200

↑

DELFA

✦

4 NM Holding Pattern

ZEYNU

055°→

←235°

6000

2200

ENUKE

✕

2000

235°

235°

≤3.00°

TCH 45

4.8 NM

5 NM

RW24

⋯

2200

↑

CATEGORY	A		B	C	D
LP MDA	880-1	445 (500-1)	880-1⅛ 445 (500-1⅛)	NA	
LNAV MDA	900-1	465 (500-1)	900-1⅜ 465 (500-1⅜)	NA	
C CIRCLING	960-1	525 (600-1)	960-1½ 525 (600-1½)	NA	