

APP CRS 173°	Rwy Idg	12000
	TDZE	5357
	Apt Elev	5434


RNAV (RNP) Z RWY 16L
DENVER INTL (DEN)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 45°C (114°F). GPS required. For inoperative MALSR, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 5000. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct BINBE and hold, continue climb-in-hold to 10000.

D-ATIS		DENVER APP CON		DENVER TOWER		GND CON	CLNC DEL	CPDLC
ARR	125.6 379.9	119.3 307.3	120.35 379.3	135.3 351.95	121.35 379.175	118.75		
DEP	134.025	(NORTH)	(SOUTH)					

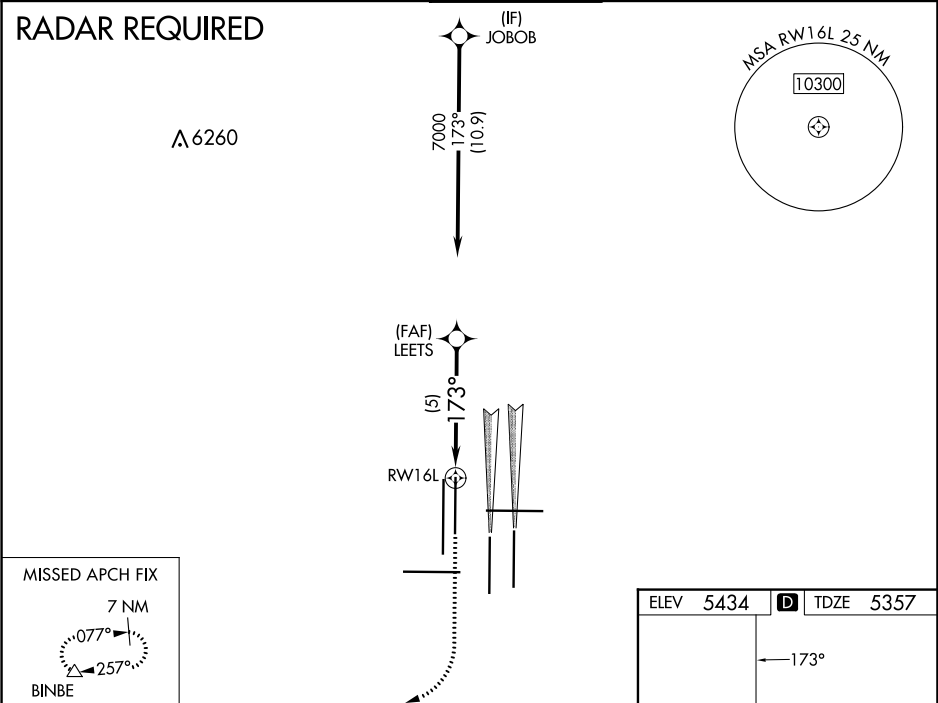

5900	10000	BINBE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
			LEETS 7000			
			7000 GP 3.00° TCH 60			
			5 NM			
CATEGORY	A	B	C	D		
RNP 0.10 DA	5617/24 260 (200-½)					
RNP 0.30 DA	5683/32 326 (300-⅔)					
AUTHORIZATION REQUIRED						

HIRL all Rwys

TDZ/CL Rwys 7, 16L, 16R,

17R, 26, 34L, 34R, 35L, 35R

