

24081

RNAV (RNP) Z RWY 28
HARTSFIELD-JACKSON ATLANTA INTL (ATL)

T

For uncompensated baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.

ALSF-2




MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						ALL RWYS	GND CON	ALL RWYS
DER 119.65		8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	
APP 125.55	127.9	379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75 121.65 254.4

CLNC
DEL
118.1

CPDLC
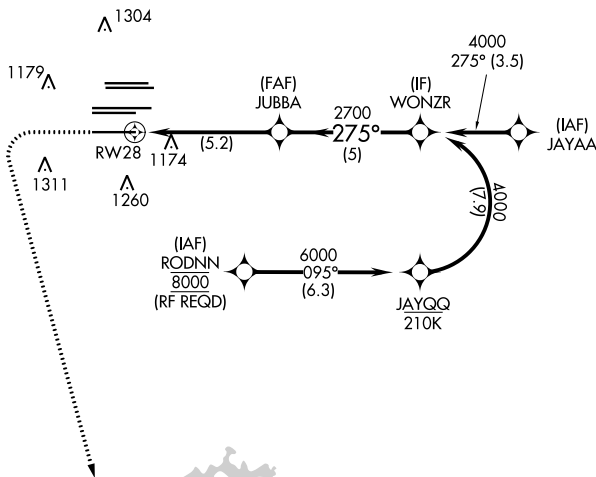
$$\begin{array}{r} \Delta \\ 2049 \end{array} \quad \begin{array}{r} \Delta \\ 2049 \end{array}$$


ELEV 1026	D	TDZE 998
-----------	----------	----------


MISSED APCH FIX

SCARR


185°

4 N

0.05 m



1500	3000	SCARR
		

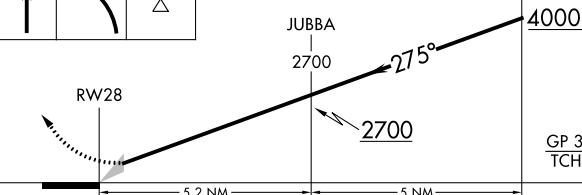

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R,
27L and 28

AUTHORIZATION REQUIRED

ATLANTA, GEORGIA
Amdt 1 12OCT17

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

33°38'N-84°26'W

RNAV (RNP) Z RWY 28

SE-4, 18 APR 2024 to 16 MAY 2024