

WAAS CH 70720 W17A	APP CRS 171°	Rwy Idg 5001 TDZE 348 Apt Elev 352
--	------------------------	---


RNAV (GPS) RWY 17

AUGUSTA STATE (AUG)

⚠ DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 mile. For inop MALSR when using Waterville altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ mile. VDP and Baro-VNAV NA with Waterville altimeter setting. When local altimeter setting not received, use Waterville altimeter setting; increase LPV DA to 583 feet, LNAV/VNAV DA to 710 feet, and visibility LNAV/VNAV all Cats ½ SM; increase all MDA 40 feet and visibility LNAV Cats C and D ½ SM, and Circling Cat D ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C (-22°F) or above 41°C (105°F). Rwy 8, 26 helicopter visibility below 1 SM NA. Circling Rwy 8 and 26 NA at night. When VGSI inop, Circling Rwy 35 NA at night.


MALSR
MISSED APPROACH:
Climb to 800 then climbing left turn to 3000 direct RAZZR and hold.

ASOS 118.325	PORTLAND APP CON * 128.35 299.2	CLNC DEL 119.95 299.2	UNICOM 123.0 (CTAF)
------------------------	---	---------------------------------	-------------------------------

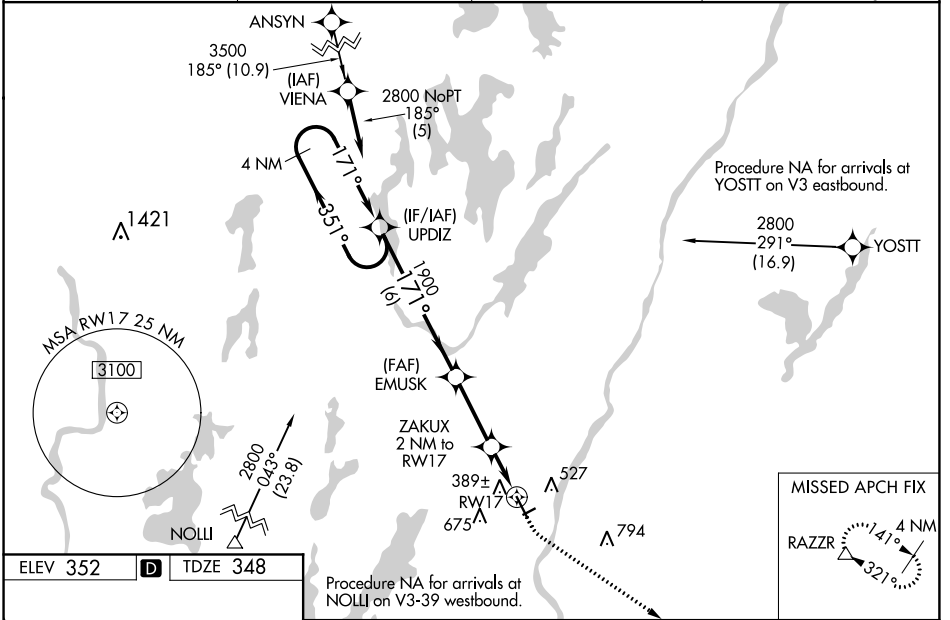

ELEV 352	D	TDZE 348
----------	----------	----------

MIRL Rwy 8-26 **Ⓛ**
HIRL Rwy 17-35 **Ⓛ**
REIL Rwy 35 **Ⓛ**

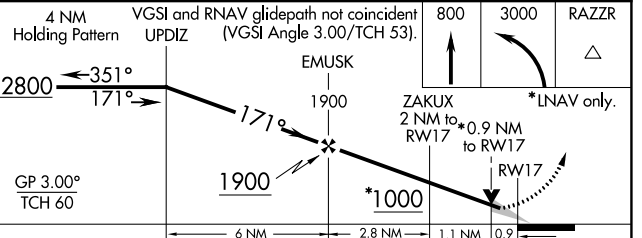

CATEGORY	A	B	C	D
LPV DA		548-½	200 (200-½)	
LNAV/VNAV DA		675-⅝	327 (400-⅝)	
LNAV MDA		640-½	292 (300-½)	
C CIRCLING	960-1 608 (700-1)	980-1 628 (700-1)	980-¾ 628 (700-¾)	1160-2½ 808 (900-2½)

NE-1, 14 JUL 2022 to 11 AUG 2022

NE-1, 14 JUL 2022 to 11 AUG 2022