RNAV (GPS) Y RWY 17R

CITY OF COLORADO SPRINGS MUNI (COS)

WAAS CH 72800 W17B	APP CRS 172°	Rwy Idg 11022 / TDZE 6177 / Apt Elev 6187

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC RWY 17L and ILS RWY 17L (SA CAT I). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 7000 then climbing left turn to 9000 direct DRAKE and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON	CLNC DEL
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6	134.45 363.125

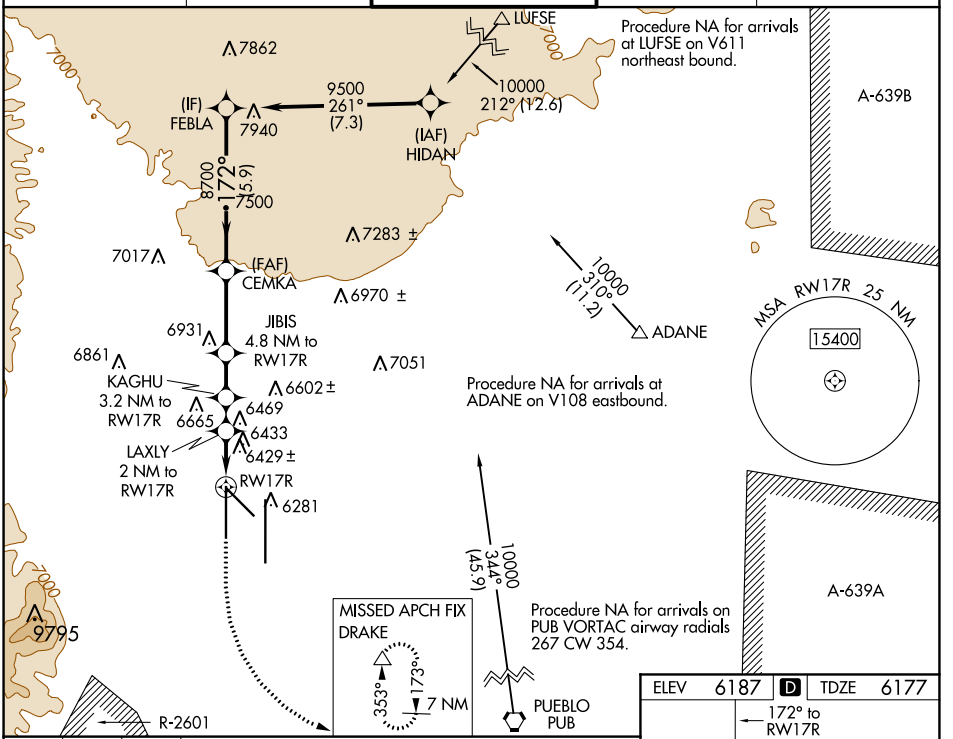

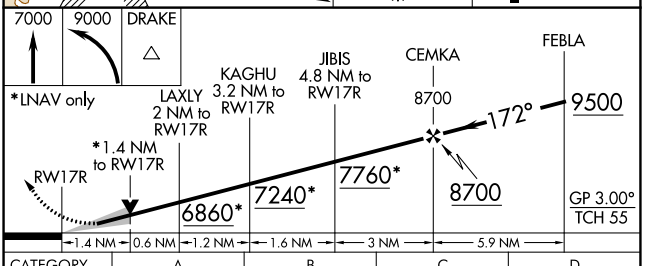

CATEGORY	A	B	C	D
LPV DA	6377/40 200 (200-¾)			
LNAV/VNAV DA	6752-2 575 (600-2)			
LNAV MDA	6680/55 503 (500-1)		6680-1⅜ 503 (500-1⅜)	
C CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

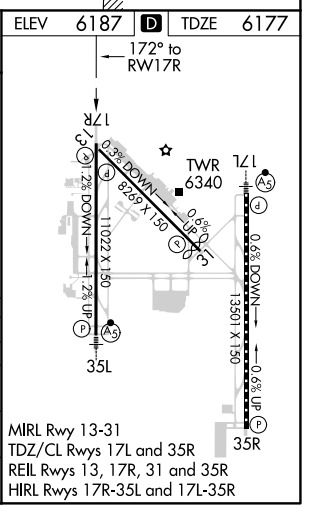

MIRL Rwy 13-31
TDZ/CL Rwys 17L and 35R
REIL Rwys 13, 17R, 31 and 35R
HIRL Rwys 17R-35L and 17L-35R

SW-1, 09 SEP 2021 to 07 OCT 2021
SW-1, 09 SEP 2021 to 07 OCT 2021