

APP CRS	Rwy Idg	12020
222°	TDZE	3950
	Apt Elev	3962

RNAV (RNP) Z RWY 22

EL PASO INTL (ELP)


RNP AR APCH.
 ▼ For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.
 ASR

MALSR





MISSED APPROACH: Climb to 4400 then climbing left turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1
------------------------------	---	---------------------------------------	-------------------------------	--------------------------------

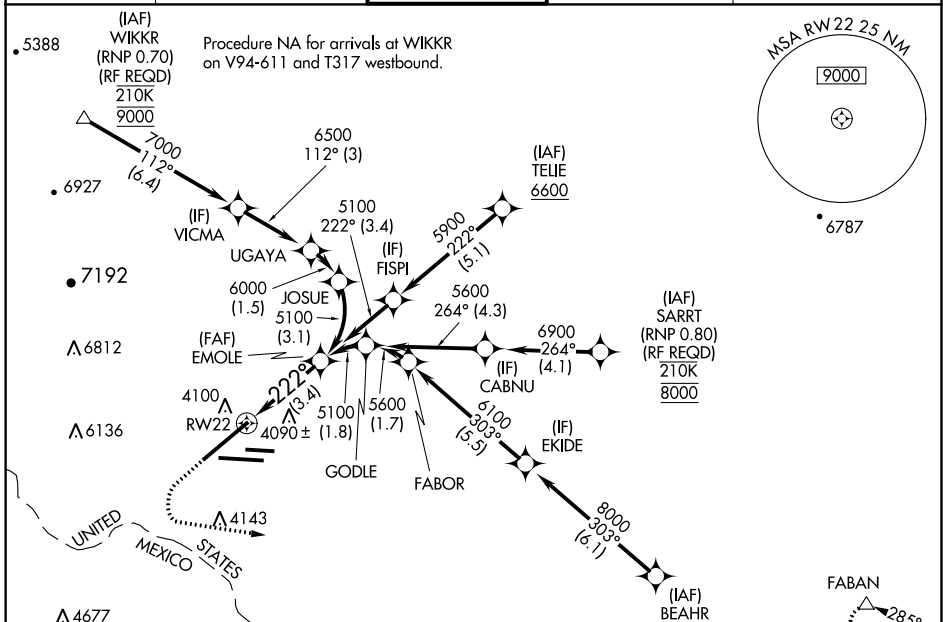

ELEV	3962	D	TDZE	3950
------	-------------	----------	------	-------------

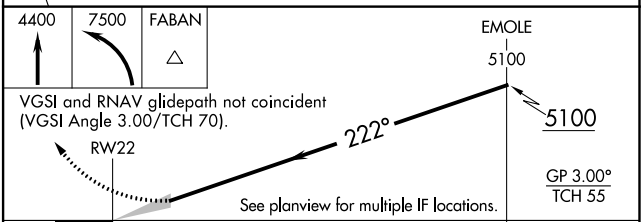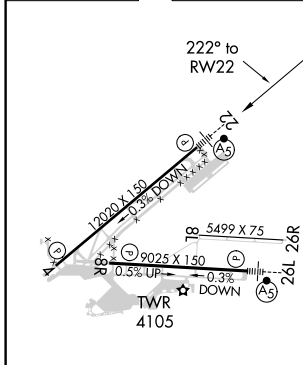

See planview for multiple IF locations.	3.4 NM			
CATEGORY	A	B	C	D
RNP 0.10 DA		4200/24	250 (300-1/2)	
RNP 0.30 DA		4270/27	320 (400-5/8)	

MIRL Rwy 8L-26R
 REIL Rws 4 and 8R
 HIRL Rws 4-22 and 8R-26L

AUTHORIZATION REQUIRED

SC-3, 19 MAY 2022 to 16 JUN 2022

SC-3, 19 MAY 2022 to 16 JUN 2022