


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 82417 W32A | APP CRS 321° | Rwy Idg TDZE Apt Elev | 8001 800 815 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 32

FORT WAYNE INTL (FWA)



| | | | | |
|---|--|--|--|-----------------------------------|
| <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.</p> | | <p>MALSR</p> | <p>MISSED APPROACH: Climb to 3000 direct LABIC and hold.</p> | |
| <p>ATIS 121.25 360.825</p> | <p>FORT WAYNE APP CON 127.2 284.6</p> | <p>FORT WAYNE TOWER 119.1 269.325</p> | <p>GND CON 121.9 348.6</p> | <p>CLNC DEL 124.75</p> |

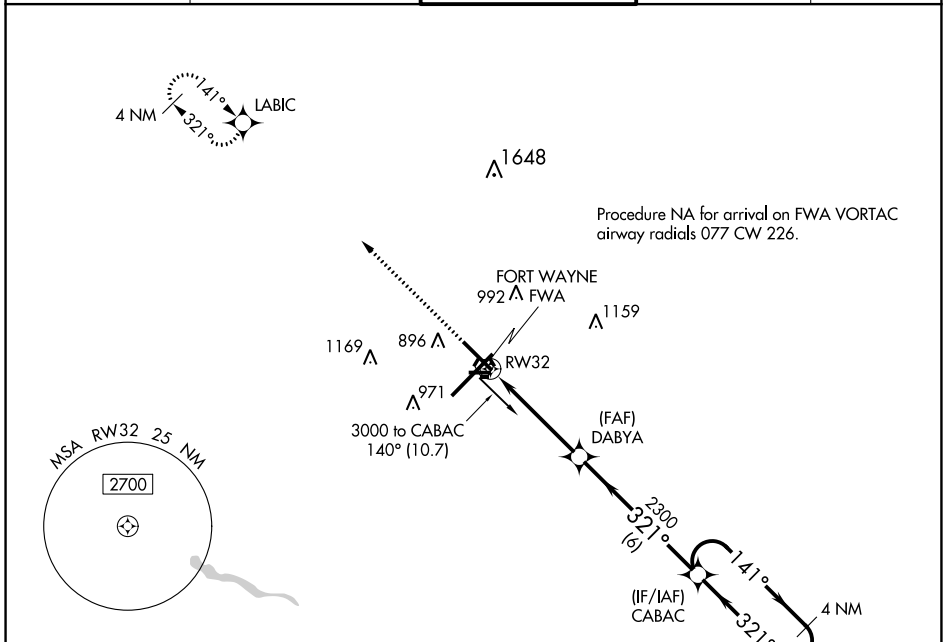

EC-2, 08 AUG 2024 to 05 SEP 2024

EC-2, 08 AUG 2024 to 05 SEP 2024

| | | | | |
|------|------------|----------|------|------------|
| ELEV | 815 | D | TDZE | 800 |
|------|------------|----------|------|------------|

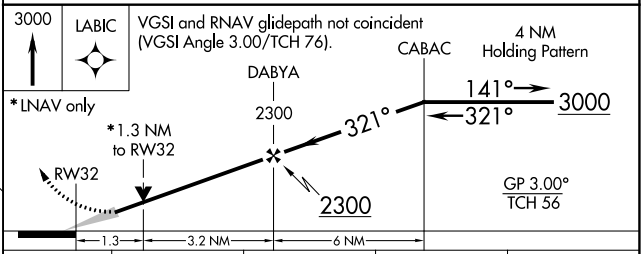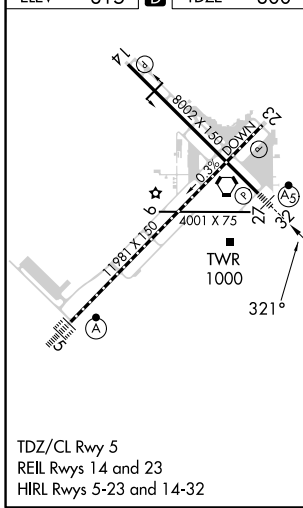

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-------------|-------------------------|-------------------------|
| LPV DA | **1000/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1250/50 450 (500-1) | | | |
| LNAV MDA | 1280/24 | 480 (500-½) | 1280/50 | 480 (500-1) |
| C CIRCLING | 1300-1 | 485 (500-1) | 1420-1¾ 605 (700-1¾) | 1520-2¼ 705 (800-2¼) |