
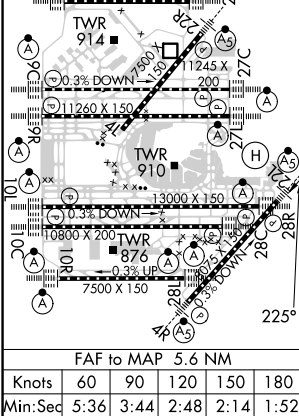


LOC I-LQQ	APP CRS	Rwy ldg	8075
110.1	225°	TDZE	654
		Apt Elev	680

ILS or LOC RWY 22L
CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct CGT VORTAC and hold.
	Simultaneous approach authorized.		

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 120.75 348.0	124.125 118.05 226.675	GND CON (TWR NORTH) (TWR SOUTH) (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
----------------------------	-------------------------------------	------------------------------	------------------------------	---	---	-------------------	-------

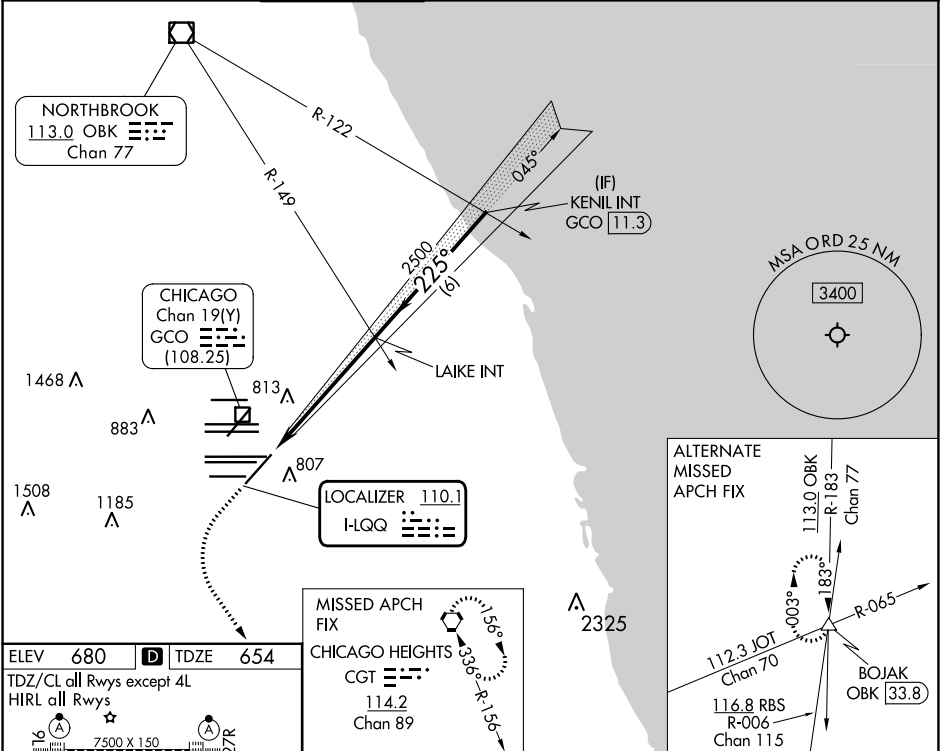

ELEV 680 TDZE 654		CHICAGO HEIGHTS CGT 114.2 Chan 89		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).	
1100 4000 CGT		LAKE INT 2500		KENIL INT GCO 11.3	
CATEGORY		A		B	
S-ILS 22L		854/18		200 (200-1/2)	
S-LOC 22L		1120/24		466 (500-1/2)	
CIRCLING		1220-1		540 (600-1)	
		1220-1 1/2		540 (600-1 1/2)	
		1460-2 1/2		780 (800-2 1/2)	