

HOUSTON, TEXAS

HI-ILS Y or LOC Y RWY 35L

| | | |
|---------------------------|-------------------------|-------------------------|
| LOC I-EFD 111.1 | APCH CRS 354° | Rwy Idg 9001 |
| | | TDZE 28 |
| | | Arprt Elev 33 |

[USAF]


ELLINGTON (KEFD)

DME required. RADAR required for procedure entry.

MALSF MISSED APPROACH: Climb to 500 then climbing right turn to 3100 via EFD TACAN R-136 to WATFO/EFD 16 DME and hold.

▼ * When ALS inop, increase CAT CDE RVR to 60.
** Circling not authorized W of rwy 17L-35R

| | | | |
|------------------------------|--|------------------------------|-------------------------------|
| ATIS 135.575 269.9 | HOUSTON APP CON 134.45 284.0 | TOWER 126.05 253.5 | GND CON 121.6 275.8 |
|------------------------------|--|------------------------------|-------------------------------|

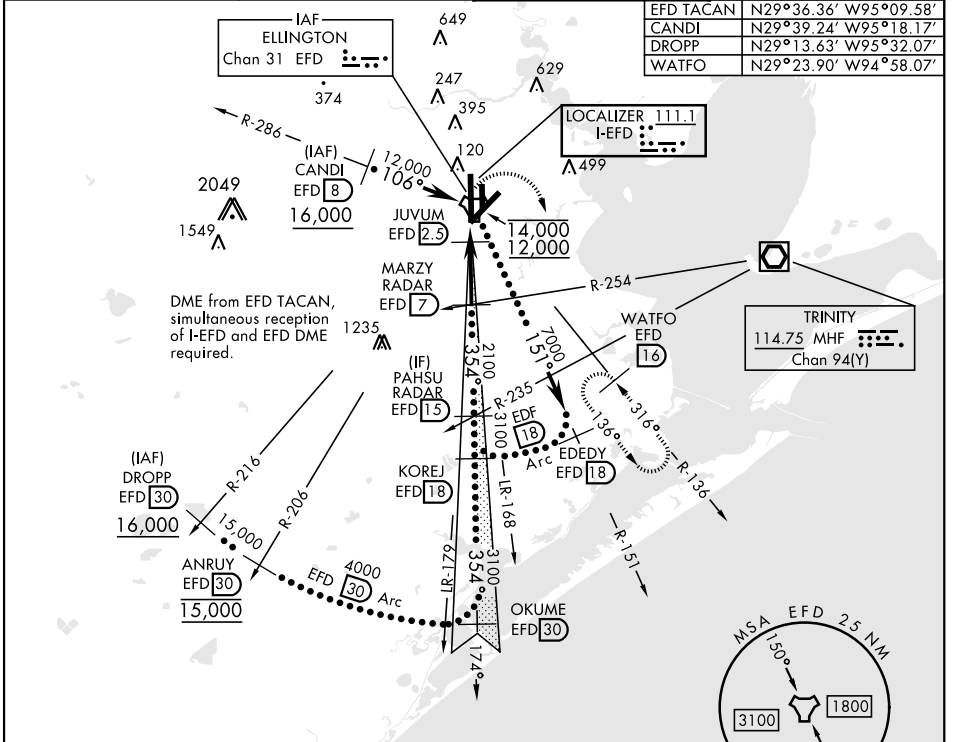


SC-5, 21 MAR 2024 to 18 APR 2024


SC-5, 21 MAR 2024 to 18 APR 2024

EMERG SAFE ALT 100 NM 16,000

| | | | | | |
|-----|-----------|--------|-------------|--------------|--------|
| 500 | 3100 | WATFO | MARZY | PAHSU | KOREJ |
| ↑ | EFD R-136 | EFD 16 | EFD 7 RADAR | EFD 15 RADAR | EFD 18 |

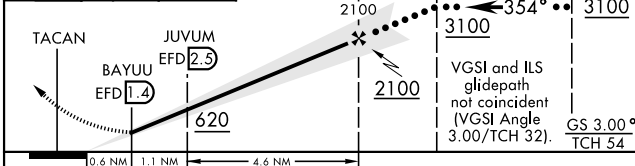

| | | |
|---------|---|---------|
| ELEV 33 | D | TDZE 28 |
|---------|---|---------|

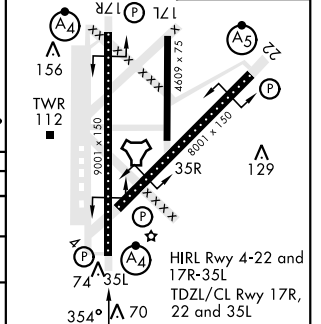

| CATEGORY | C | D | E |
|--------------------|------------------------|----------------------|------------------------|
| S-ILS 35L | 228/40 | 200 | (200-¾) |
| S-LOC 35L * | 440/50 | 412 | (500-1) |
| CIRCLING ** | 580-1½ 547 (600-1½) | 640-2 607 (700-2) | 700-2¼ 667 (700-2¼) |

HOUSTON, TEXAS

29°36'N-95°10'W

ELLINGTON (KEFD)

Amtd 4A 15AUG19

HI-ILS Y or LOC Y RWY 35L