RNAV (GPS) RWY 23R

MC GHEE TYSON (TYS)

WAAS	APP CRS	Rwy Idg	9495
CH 81902	231°	TDZE	984
W23A		Apt Elev	986

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold.

ATIS	KNOXVILLE APP CON	KNOXVILLE TOWER	GND CON	CLNC DEL
128.35	123.9 360.8	121.2 257.8	121.9 348.6	121.65

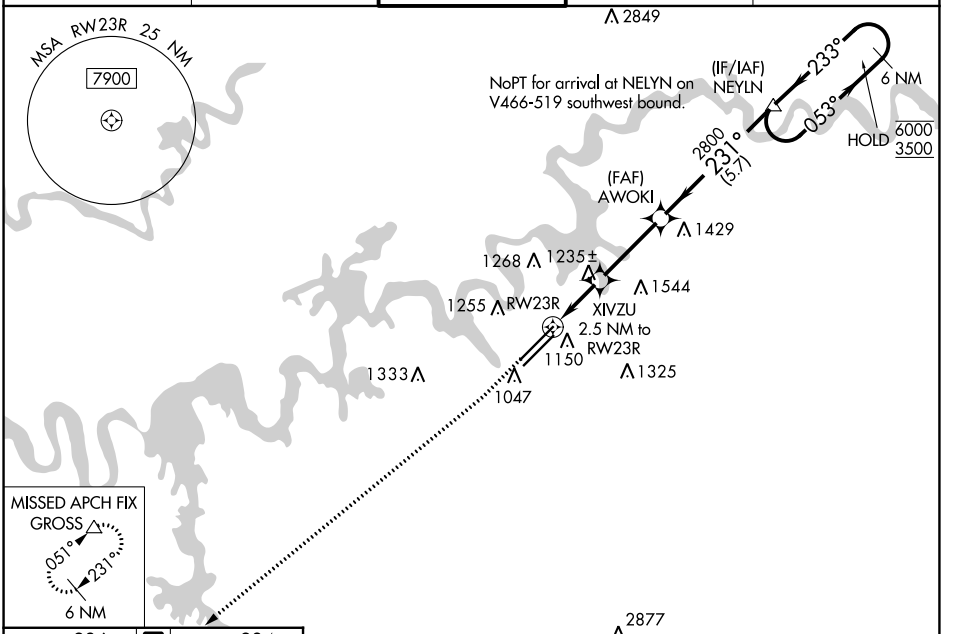

ELEV 986 D TDZ 984



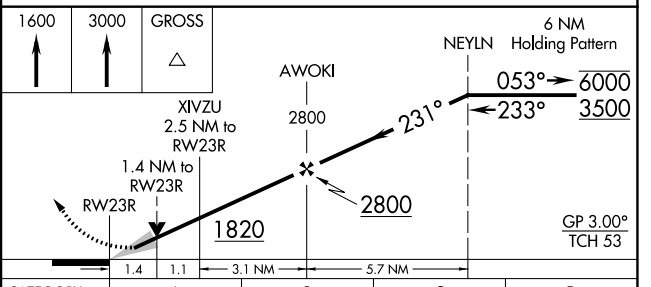

CATEGORY	A	B	C	D
LPV DA	1184/18 200 (200-½)			
LNAV/VNAV DA	1529-1⅛ 545 (600-1⅛)			
LNAV MDA	1500/24 516 (600-½)		1500/55 516 (600-1)	
C CIRCLING	1500-1 514 (600-1)	1560-1 574 (700-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

HIRL Rwys 5L-23R and 5R-23L
REIL Rwys 5R and 23L
TDZ/CL Rwys 5R and 23R

SE-1, 31 OCT 2024 to 28 NOV 2024
SE-1, 31 OCT 2024 to 28 NOV 2024