



WAAS CH 48802 W05A	APP CRS 051°	Rwy Idg 9508 TDZE 953 Apt Elev 986
---------------------------------	------------------------	---

RNAV (GPS) RWY 5L


MC GHEE TYSON (T'YS)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.
<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. * RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

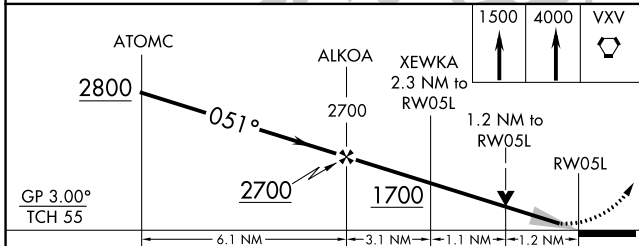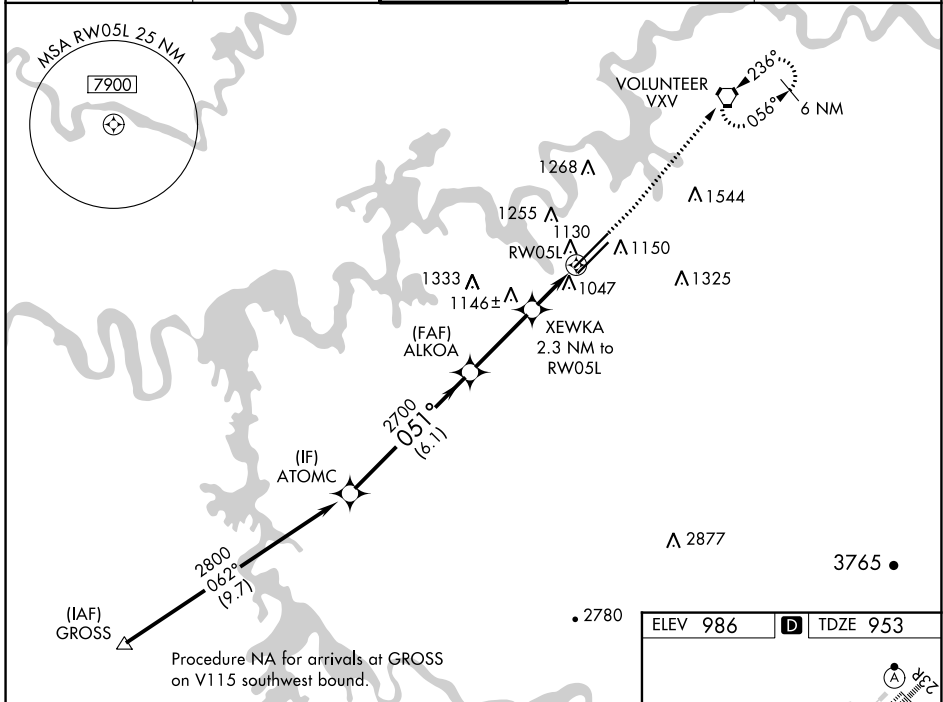

ELEV 986	D TDZE 953
----------	-------------------



CATEGORY	A	B	C	D
LPV DA*		1153/24	200 (200-½)	
LNAV/VNAV DA		1291/26	338 (400-½)	
LNAV MDA	1380/24	427 (400-½)	1380/40	427 (400-¾)
C CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

HIRL Rwy 5L-23R and 5R-23L
REIL Rwy 5R and 23L
TDZ/CL Rwy 5R and 23R