RNAV (GPS) RWY 32

LINCOLN (LNK)

WAAS	APP CRS	Rwy Idg	7816
CH 69328	322°	TDZE	1192
W32A		Apt Elev	1219

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). When local altimeter setting not received, use Beatrice altimeter setting and increase all DA 91 feet and all MDA 100 feet, increase LPV all Cats visibility ⅛ mile, increase LNAV/VNAV all Cats visibility ⅜ mile, increase LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Beatrice altimeter setting.

MISSED APPROACH: Climb to 3200 direct ZUBTO and hold.

ATIS	OMAHA APP CON	LINCOLN TOWER★	GND CON	CLNC DEL	UNICOM
118.05 290.9	124.0 270.3	118.5 (CTAF) 253.5	121.9 275.8	120.7 225.4	122.95

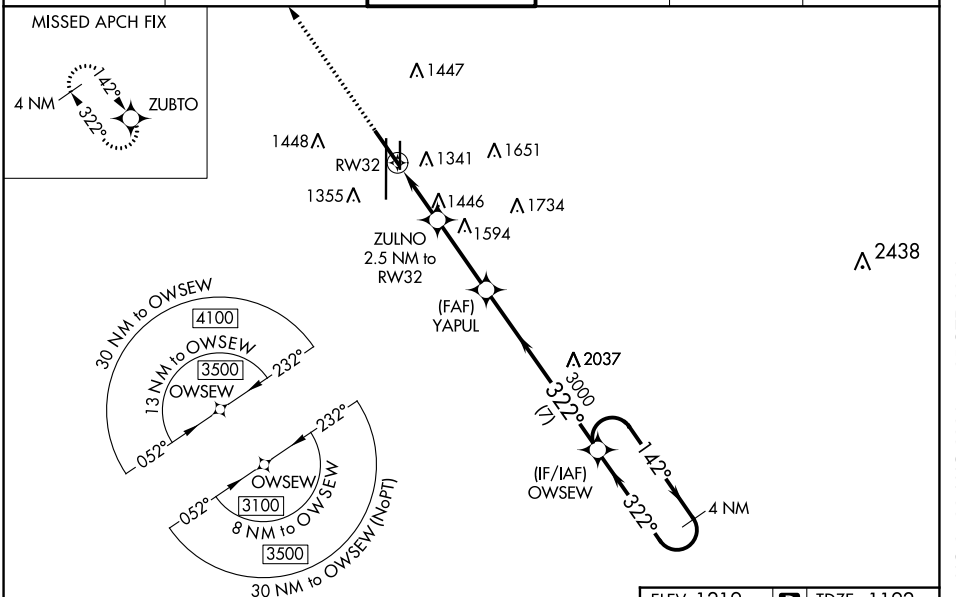

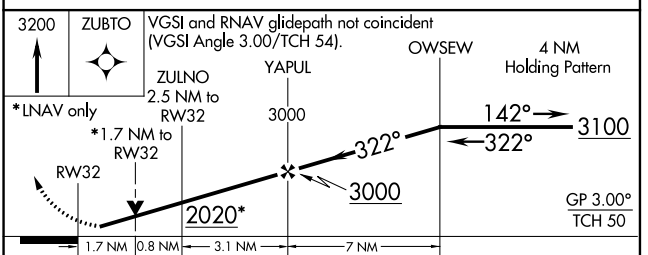

CATEGORY	A	B	C	D
LPV DA	1442-1 250 (300-1)			
LNAV/VNAV DA	1576-1¼ 384 (400-1¼)			
LNAV MDA	1760-1 568 (600-1)		1760-1¾ 568 (600-1¾)	
CIRCLING	1760-1 541 (600-1)		1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)

ELEV 1219 D TDZE 1192



HIRL Rwy 18-36
REIL Rwys 14 and 17
MIRL Rwys 14-32 and 17-35

NC-2, 08 AUG 2024 to 05 SEP 2024
NC-2, 08 AUG 2024 to 05 SEP 2024