ILS or LOC RWY 27

THE EASTERN IOWA (CID)

LOC/DME I-RRU	APP CRS	Rwy Idg	8175
111.3	269°	TDZE	862
Chan 50		Apt Elev	869

VDP NA with Iowa City altimeter setting. Autopilot coupled approach NA below 1910. When local altimeter setting not received, use Iowa City altimeter setting: increase DA to 1126 feet; increase all MDA 80 feet, increase S-LOC Cat C and D visibility to RVR 5000, and Circling Cat C and D visibility ¼ SM.
#RVR 1800 authorized with use of FD or HUD to DA (NA when using Iowa City altimeter setting).

MALSR

MISSED APPROACH: Climb to 2900 direct CID VOR/DME and hold, continue climb-in-hold to 2900.

ATIS	CEDAR RAPIDS APP CON ★	CEDAR RAPIDS TOWER ★	GND CON	CLNC DEL	UNICOM
124.15	119.7 266.8	118.7 (CTAF) L 266.8	121.6	125.45	122.95

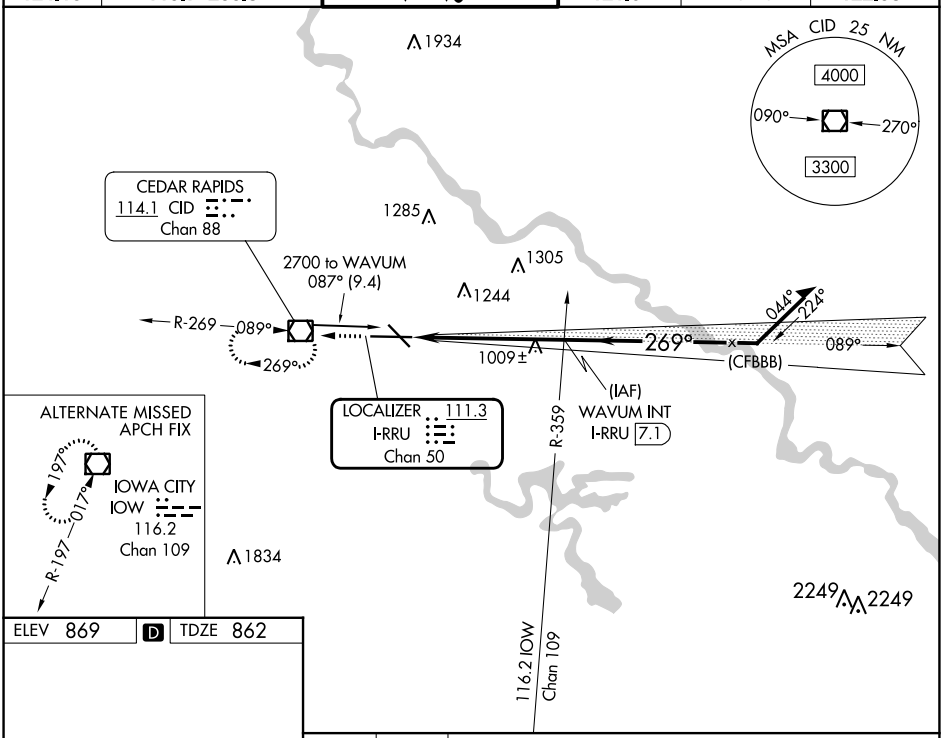

ELEV 869 D TDZE 862



MIRL Rwy 13-31 L
HIRL Rwy 9-27 L
REIL Rwy 13

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

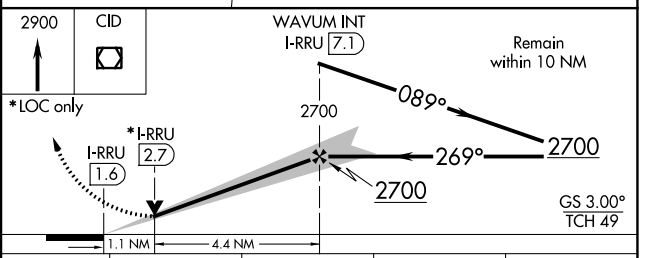

CATEGORY	A	B	C	D
S-ILS 27 #	1062/24 200 (200-½)			
S-LOC 27	1260/24 398 (400-½)		1260/35 398 (400-⅝)	
CIRCLING	1280-1 411 (500-1)	1320-1 451 (500-1)	1560-2 691 (700-2)	1560-2¼ 691 (700-2¼)

NC-3, 31 OCT 2024 to 28 NOV 2024
NC-3, 31 OCT 2024 to 28 NOV 2024