


WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L

MELBOURNE ORLANDO INTL (MLB)

RNP APCH.		MISSED APPROACH: Climb to 2000 direct SUROY and hold.			
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).					



ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------	--	-------------------------

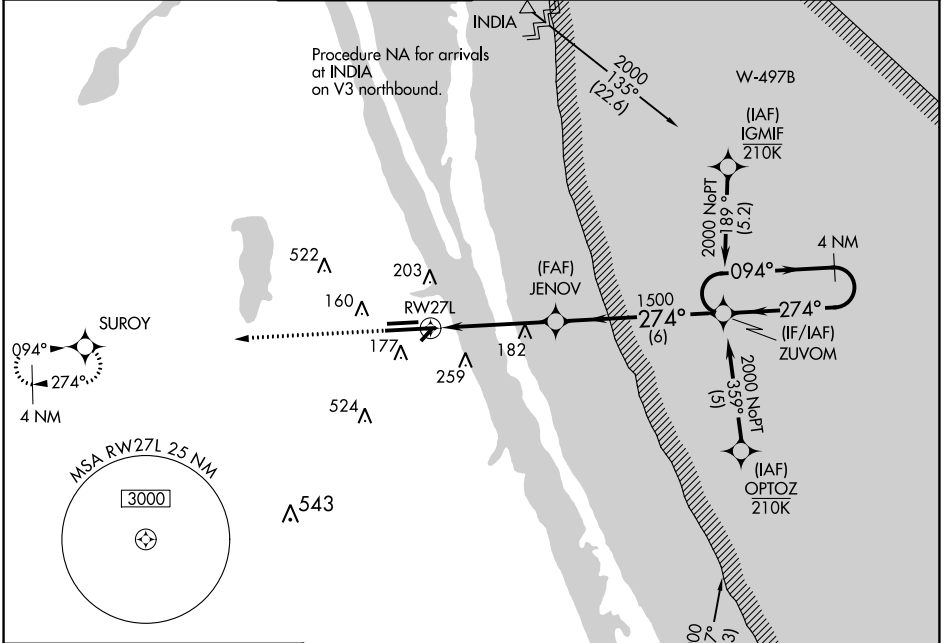

ELEV 33	D	TDZE 26
---------	----------	---------

Procedure NA for arrivals on TRV VORTAC airway radials 325 CW 350.

TREASURE TRV

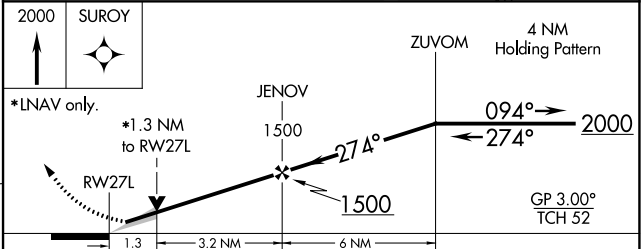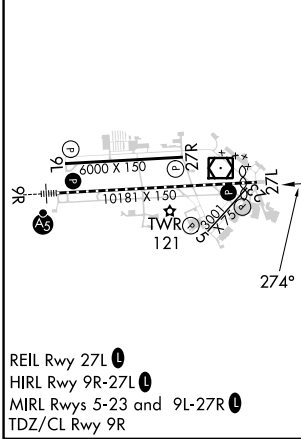

CATEGORY	A	B	C	D
LPV DA		226-3/4	200 (200-3/4)	
LNAV/VNAV DA		318-7/8	292 (300-7/8)	
LNAV MDA	500-1	474 (500-1)	500-1 3/8	474 (500-1 3/8)
C CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1 3/4 647 (700-1 3/4)	880-2 3/4 847 (900-2 3/4)

SE-3, 03 OCT 2024 to 31 OCT 2024

SE-3, 03 OCT 2024 to 31 OCT 2024