

# MAYNR TWO DEPARTURE(RNAV)

**TOP ALTITUDE:  
ASSIGNED BY ATC**





RNAV1 - DME/DME/IRU or GPS. From SLIPT to MAXIM: RNAV 1 - GPS. From SLIPT to CANOA: RNAV 1 - GPS. RADAR required.
--

MIAMI DEP CON  
 119.45 290.325  
 ATIS  
 125.9  
 CLNC DEL  
 119.2  
 GND CON  
 120.025  
 OPA LOCKA TOWER \*  
 134.675 (CTAF)

### TAKEOFF MINIMUMS

Rwy 9L: Standard with minimum climb of 500'/NM to 1000.  
 Rwy 9R: Standard with minimum climb of 500'/NM to 700.  
 Rwys 12, 27R: Standard with minimum climb of 500'/NM to 600.  
 Rwys 27L, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.  
 NOTE: Accelerate to 250K until leaving  
 10000, if unable, advise ATC.

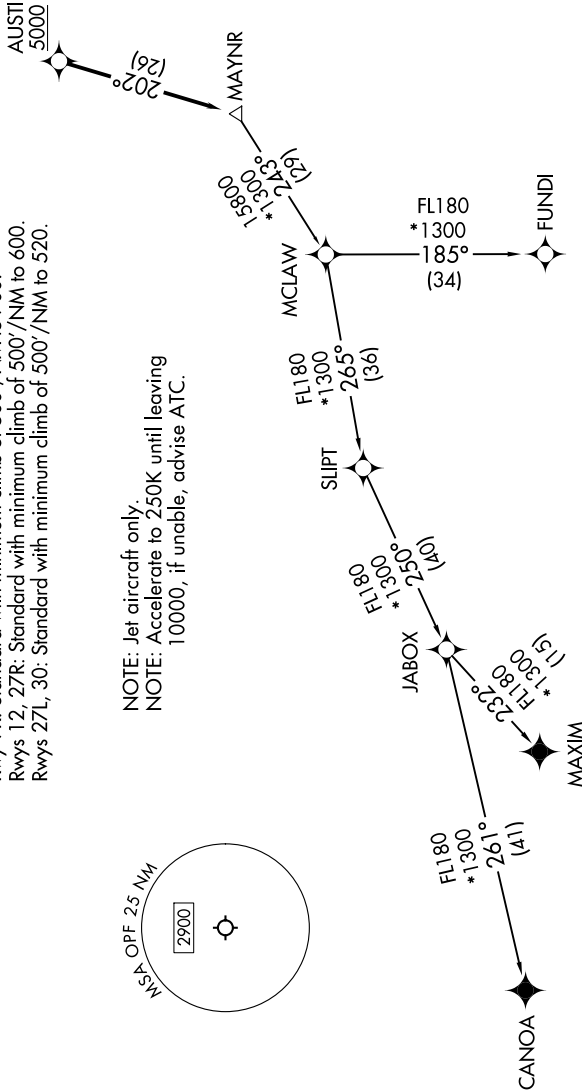

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

# MAYNR TWO DEPARTURE(RNAV)