




| | | |
|----------------------------------------|------------------------|-----------------------------------------------------------|
| WAAS CH 62922 W27A | APP CRS 273° | Rwy Idg 8002 TDZE 8 Apt Elev 8 |
|----------------------------------------|------------------------|-----------------------------------------------------------|

RNAV (GPS) RWY 27R

MIAMI-OPA LOCKA EXEC (OPF)

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------|----------------------------------------------------------------------------------|
| RNP APCH - GPS. | | MALS | MISSED APPROACH: Climb to 2000 direct SAZBO and on track 317° to BRBRA and hold. |
| Baro-VNAV NA when using Miami Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet and Circling Cat D visibility ¼ SM. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats to 1½ SM, and LNAV Cats C and D visibility to 1½ SM. Rwy 27R helicopter visibility reduction below ¾ SM NA. | | | |

| | | | | | |
|----------------------|---------------------------------------|----------------------------------------------|---------------------------|--------------------------|----------------------|
| ATIS 125.9 | MIAMI APP CON 128.6 306.975 | OPA LOCKA TOWER ★ 134.675 (CTAF) 0 | GND CON 120.025 | CLNC DEL 119.2 | GCO 119.45 |
|----------------------|---------------------------------------|----------------------------------------------|---------------------------|--------------------------|----------------------|

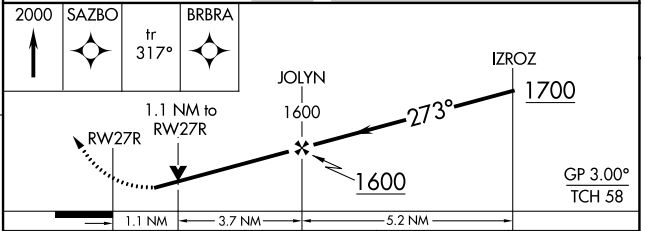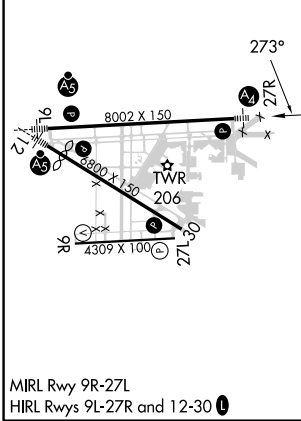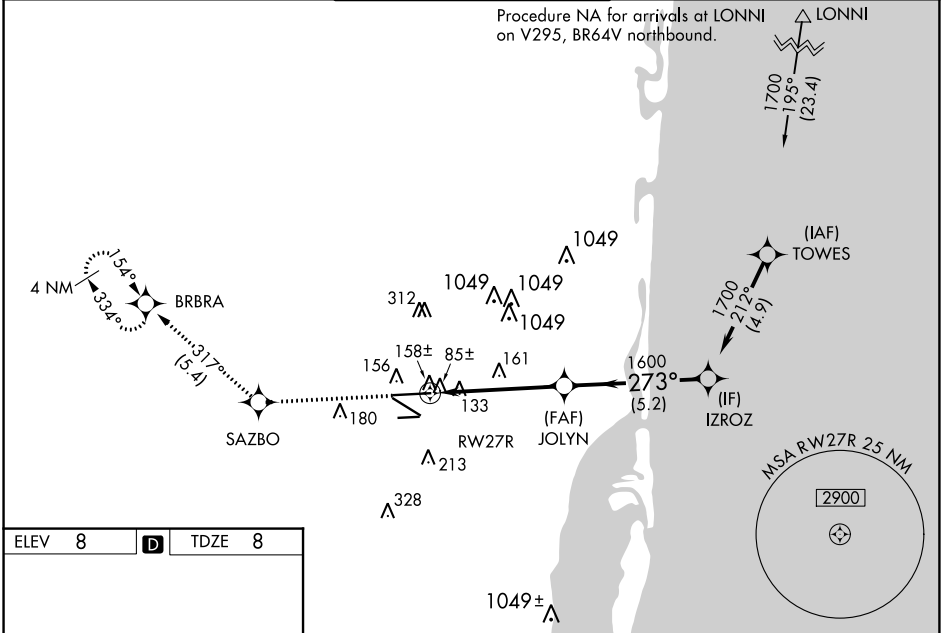

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|------------------------|------------------------|
| LPV DA | | 291-¾ | 283 (300-¾) | |
| LNAV/VNAV DA | | 413-1 | 405 (500-1) | |
| LNAV MDA | 420-¾ | 412 (500-¾) | 420-1 | 412 (500-1) |
| CIRCLING | 540-1 | 532 (600-1) | 620-1¾ 612 (700-1¾) | 740-2¼ 732 (800-2¼) |

SE-3, 03 OCT 2024 to 31 OCT 2024

SE-3, 03 OCT 2024 to 31 OCT 2024