

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>61218</b><br><b>W35B</b> | APP CRS<br><b>356°</b> | Rwy Idg<br>TDZE <b>1294</b><br>Apt Elev <b>1296</b> |
|--|------------------------|---|




# RNAV (GPS) Y RWY 35R

OKC WILL ROGERS INTL (OKC)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF, increase LPV and LNAV/VNAV Cat E visibility to RVR 4000. Increase LNAV all Cats visibility to RVR 5500. Simultaneous approach authorized with Rwy 35L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

**ASR** **ALSF-2** **MISSED APPROACH:** Climb to 5000 direct ATREC and hold, continue climb-in-hold to 5000.

|                         |  |                                      |                               |                           |
|-------------------------|--|--------------------------------------|-------------------------------|---------------------------|
| D-ATIS<br><b>125.85</b> | OKC CITY APP CON<br><b>124.6 266.8</b> | ROGERS TOWER<br><b>119.35 269.45</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>124.35</b> |
|-------------------------|--|--------------------------------------|-------------------------------|---------------------------|

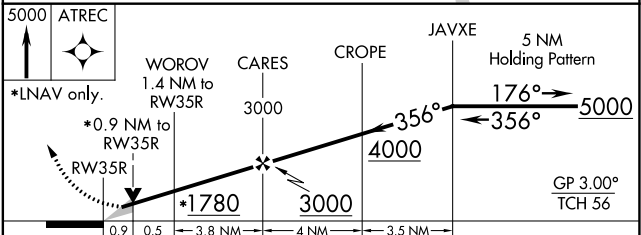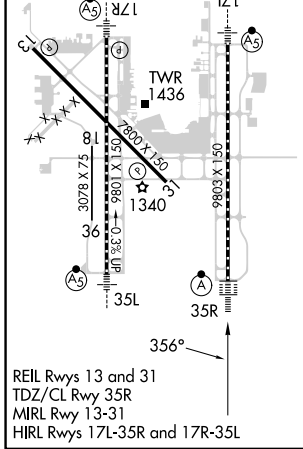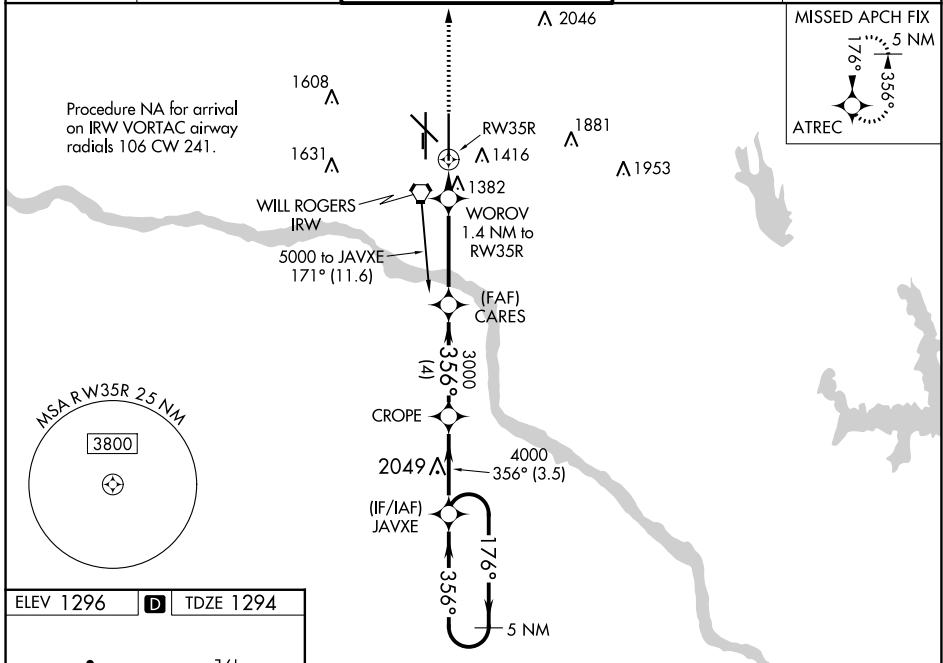

| CATEGORY          | A                     | B                     | C                       | D                       | E                      |
|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|------------------------|
| LPV DA            |                       | 1494/18               | 200 (200-½)             |                         |                        |
| LNAV/VNAV DA      |                       | 1544/24               | 250 (300-½)             |                         |                        |
| LNAV MDA          | 1640/24               | 346 (400-½)           | 1640/40                 | 346 (400-¾)             |                        |
| <b>C</b> CIRCLING | 1740-1<br>444 (500-1) | 1760-1<br>464 (500-1) | 1960-1¾<br>664 (700-1¾) | 2000-2¼<br>704 (800-2¼) | 2240-3<br>944 (1000-3) |

SC-1, 31 OCT 2024 to 28 NOV 2024

SC-1, 31 OCT 2024 to 28 NOV 2024