

WAAS CH 50202 W03A	APP CRS 035°	Rwy Idg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 3



ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, Use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅓ SM, Cat D ½ SM and Circling visibility Cat D ½ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON * 119.6 239.0	ROSWELL TOWER * 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

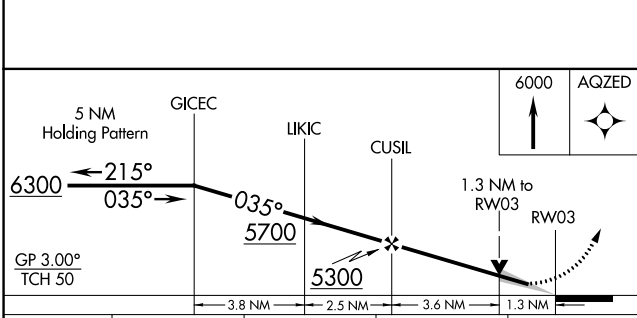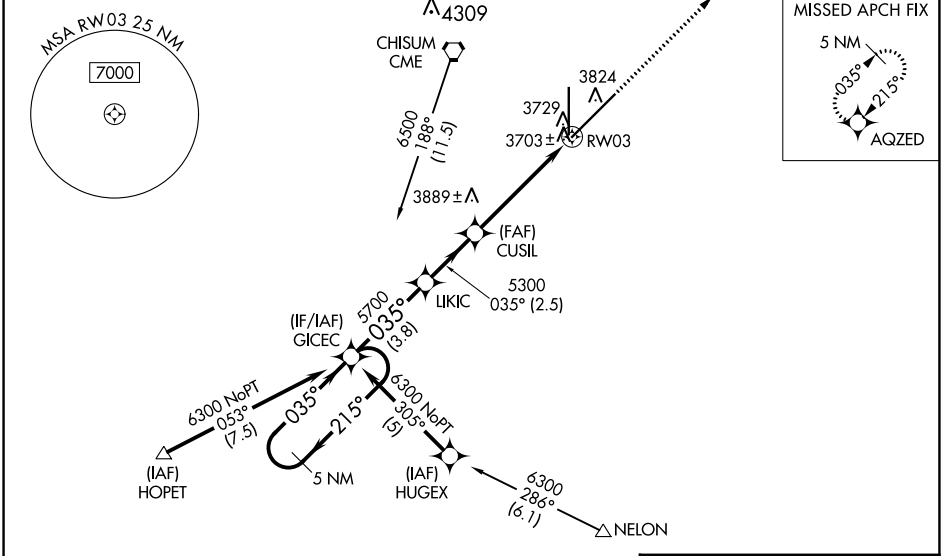

ELEV 3671 TDZE 3667

ZI

001 X 8000L

35

0.3% DOWN

0.3% UP

TWR 3786

13000 X 150

MIRL Rwy 3-21
MIRL Rwy 17-35

035°

CATEGORY	A	B	C	D
LPV DA	3917-¾		250 (300-¾)	
LNAV/VNAV DA	3987-1		320 (400-1)	
LNAV MDA	4140-1	473 (500-1)	4140-1¼ 473 (500-1¼)	4140-1½ 473 (500-1½)
CIRCLING	4140-1	469 (500-1)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)

SW-1, 31 OCT 2024 to 28 NOV 2024

SW-1, 31 OCT 2024 to 28 NOV 2024