

APP CRS
064°

Rwy ldg
TDZE
Apt Elev

7323
551
618

RNAV (GPS) RWY 6

ST LOUIS LAMBERT INTL (STL)


RNP APCH.

WAAS VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cats C/D/E visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---	---	--------------------------------	-------

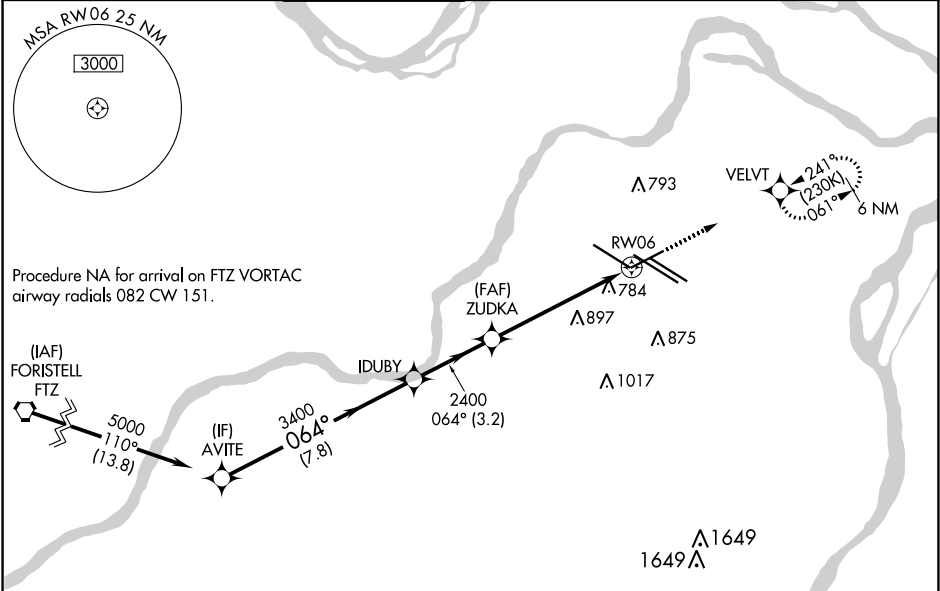

ELEV 618

D

TDZE 551

Rwy 6-24 7603 X 150

Rwy 11-29 9000 X 150

Rwy 12L-30R 9013 X 150

Rwy 12R-30L 11020 X 150

AVITE

IDUBY

ZUDKA

RWY 06

5000

3400

2400

2400

GP 3.00°

TCH 50

7.8 NM

3.2 NM

4.3 NM

1.4 NM

CATEGORY

A

B

C

D

E

LNAV/VNAV

DA

1103/60

552 (500-1¼)

LNAV MDA

1040/24

489 (500-½)

1040/50

489 (500-1)

3000

VELVT

*LNAV only

*1.4 NM to RWY 06

HIRL all Rwy's

TDZ/CL Rwy's 11, 12L, 12R, 29, and 30R