
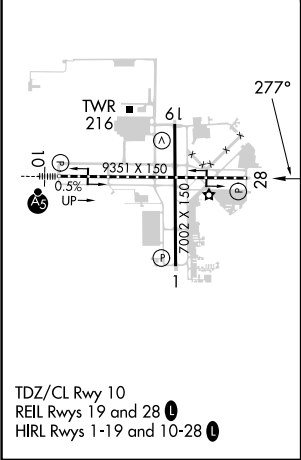


WAAS CH 40015 W28A	APP CRS 277°	Rwy Idg 9351 TDZE 50 Apt Elev 50
--	------------------------	---

RNAV (GPS) Z RWY 28
SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).		MISSED APPROACH: Climb to 2600 direct TILEE and hold.			
ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95

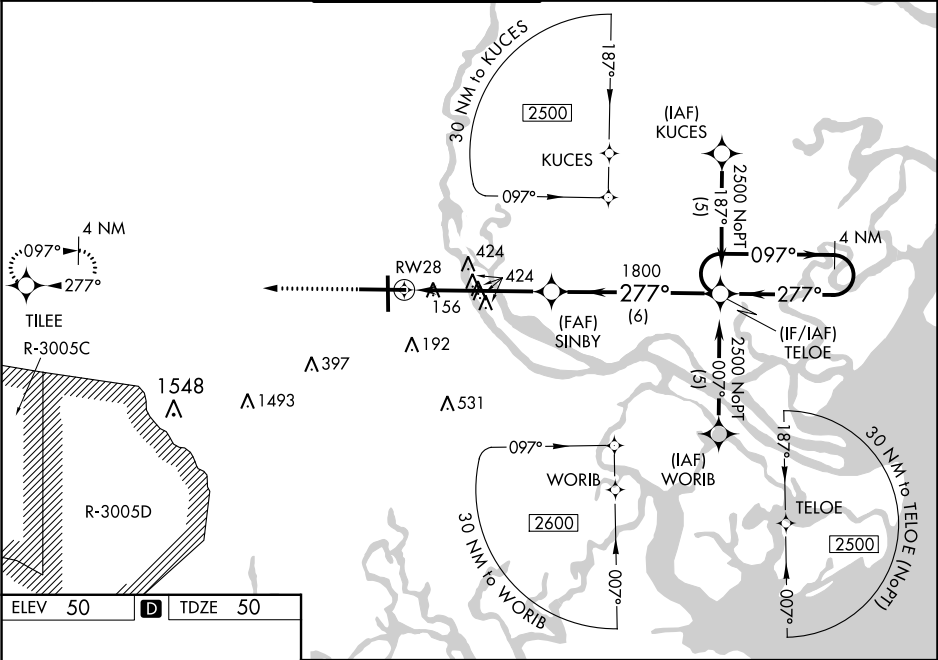

2600

TILEE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

TELOE

4 NM Holding Pattern

*LNAV only.

SINBY

1800

277°

1800

1.8 NM to RW28

1.8 NM

3.5 NM

6 NM

097°

277°

2500

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
LPV DA	307-1 257 (300-1)			
LNAV/VNAV DA	431-1¼ 381 (400-1¼)			
LNAV MDA	680-1	630 (700-1)	680-1¾	630 (700-1¾)
CIRCLING	680-1	630 (700-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)