



LOC/DME I-TPA 110.3 Chan 40	APP CRS 187°	Rwy Idg 8300 TDZE 26 Apt Elev 26
---	------------------------	---

ILS or LOC RWY 19L

TAMPA INTL (TPA)

RADAR required for procedure entry.		ALSF-2 	MISSED APPROACH: Climb to 600 then climbing left turn to 2800 on heading 160° and on PIE VORTAC R-138 to GIBBS INT/PIE 29.3 DME and hold.
Simultaneous approach authorized. For inop ALS, increase S-ILS 19L Cat E visibility to RVR 4000 and S-LOC 19L Cat C, D, and E visibility to 1 3/8 SM.			

ARR 126.45	D-ATIS 128.475	DEP 118.5 307.175	TAMPA APP CON 119.5 269.4	TAMPA TOWER 119.5 269.4	GND CON 121.7 269.4	CLNC DEL 133.6	CPDLC
----------------------	--------------------------	-----------------------------	-------------------------------------	-----------------------------------	-------------------------------	--------------------------	-------

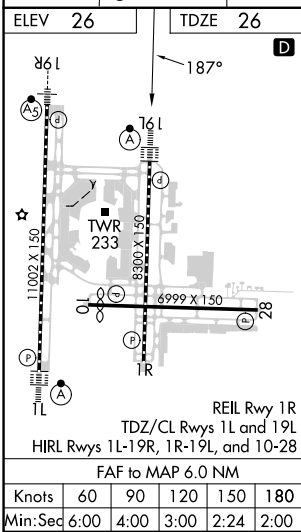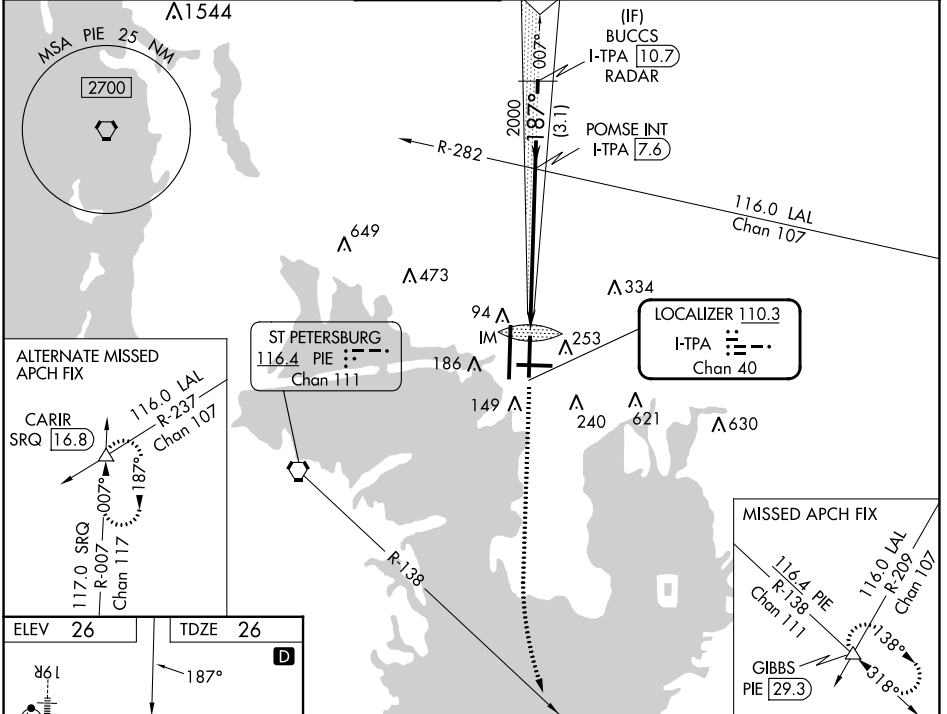

ELEV 26	TDZE 26																				
REIL Rwy 1R TDZ/Cl Rwy 1L and 19L HIRL Rwy 1L-19R, 1R-19L, and 10-28 FAF to MAP 6.0 NM																					
Knots	60 90 120 150 180																				
Min:Sec	6:00 4:00 3:00 2:24 2:00																				
CATEGORY S-ILS 19L S-LOC 19L CIRCLING	<table border="1"> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>E</th> </tr> <tr> <td colspan="5">226/18 200 (200-1/2)</td> </tr> <tr> <td>520/24</td> <td>494 (500-1/2)</td> <td colspan="2">520/50</td> <td>494 (500-1)</td> </tr> <tr> <td>560-1</td> <td>534 (600-1)</td> <td>680-1 3/4 654 (700-1 3/4)</td> <td>980-3 954 (1000-3)</td> <td>NA</td> </tr> </table>	A	B	C	D	E	226/18 200 (200-1/2)					520/24	494 (500-1/2)	520/50		494 (500-1)	560-1	534 (600-1)	680-1 3/4 654 (700-1 3/4)	980-3 954 (1000-3)	NA
A	B	C	D	E																	
226/18 200 (200-1/2)																					
520/24	494 (500-1/2)	520/50		494 (500-1)																	
560-1	534 (600-1)	680-1 3/4 654 (700-1 3/4)	980-3 954 (1000-3)	NA																	

SE-3, 11 JUL 2024 to 08 AUG 2024

SE-3, 11 JUL 2024 to 08 AUG 2024