

WAAS Ch 87099 W13A	APP CRS 130°	Rwy Idg 4559 TDZE 388 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 13



TEXARKANA RGNL-WEBB FLD (TXK)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using De Queen altimeter setting. Rwy 13 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use De Queen altimeter setting and increase LPV DA to 748 feet and all Cats visibility ¼ SM, LNAV/VNAV DA to 868 feet all Cats visibility ¾ SM, and all MDAs 100 feet and LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2000 direct WATLE and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER★ 123.875 (CTAF) 235.625	GND CON 119.225
----------------------	---	---	---------------------------

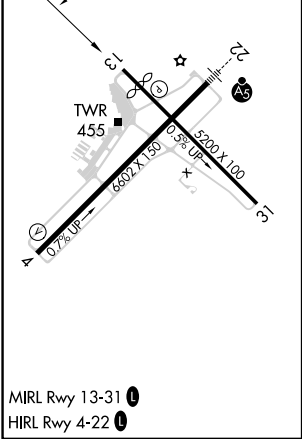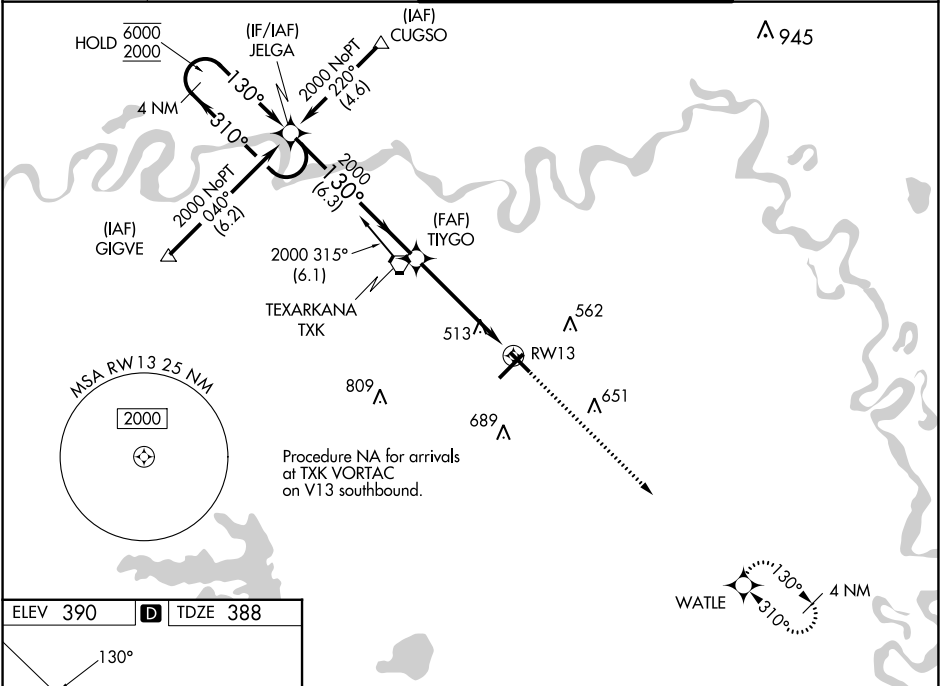

4 NM Holding Pattern				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 48).		2000 ↑		WATLE 	
6000 2000		← 310° 130° →		JELGA 130° →		2000 * 2000		1.2 NM to RW13 RW13 	
GP 3.00° TCH 54		6.3 NM		3.8 NM		1.2 NM			
CATEGORY	A		B		C		D		
LPV DA			648-3/4		260 (300-3/4)				
LNAV/DA VNAV			768-1		380 (400-1)				
LNAV MDA	780-1		392 (400-1)		780-1 1/8		392 (400-1 1/8)		
CIRCLING	820-1 430 (500-1)		900-1 510 (600-1)		1000-1 3/4 610 (700-1 1/4)		1080-2 1/4 690 (700-2 1/4)		