

VORTAC TUL 114.4 Chan 91	APP CRS 262°	Rwy Idg 7376 TDZE 652 Apt Elev 678
--	------------------------	---


VOR Y or TACAN Y RWY 26
TULSA INTL (TUL)

T Circling NA for Cat E south of Rwy 8-26. VOR Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1½ SM.
A HUKOD Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1¼ SM.
ASR




MISSED APPROACH: Climbing left turn to 2600 on heading 220° and on TUL VORTAC R-238 to KEVIL INT/TUL 25.4 DME and hold.

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (Rwys 18L-36R, 8-26) 118.7 257.8 (Rwy 18R-36L)	GND CON 121.9 348.6	CLNC DEL 134.05 284.7
------------------------------	-------------------------------------	--	-------------------------------	---------------------------------

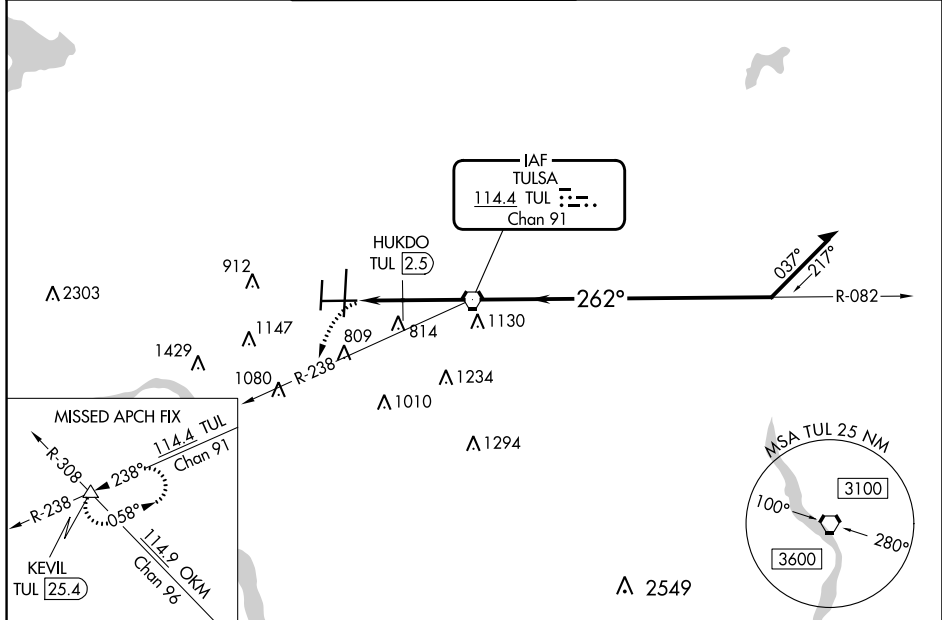

ELEV 678	D	TDZE 652
----------	----------	----------



TDZ/CL Rwy 36R
HIRL Rwys 8-26, 18L-36R and 18R-36L
REIL Rwys 8, 18R and 36L

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

2600
hdg 220°

TUL R-238

KEVIL
△

TUL VORTAC

Remain within 15 NM

082°

2400

262°

2000

HUKDO
TUL 2.5

≤ 2.96°
TCH 57

TUL 4.2

1200

1.7 NM

2.5 NM

CATEGORY	A	B	C	D	E
S-26	1200-¾ 548 (600-¾)	1200-1¼ 548 (600-1¼)			
C CIRCLING	1200-1 522 (600-1)	1520-2½ 842 (900-2½)	1520-2¾ 842 (900-2¾)	1520-3 842 (900-3)	

HUKDO FIX MINIMUMS

S-26	1080-¾ 428 (500-¾)
C CIRCLING	1120-1 442 (500-1) 1160-1 482 (500-1) 1520-2½ 842 (900-2½) 1520-2¾ 842 (900-2¾) 1520-3 842 (900-3)

CATEGORY	A	B	C	D	E
S-26	1200- ³ / ₄	548 (600- ³ / ₄)	1200-1 ¹ / ₄	548 (600-1 ¹ / ₄)	
 CIRCLING	1200-1	522 (600-1)	1520-2 ¹ / ₂ 842 (900-2 ¹ / ₂)	1520-2 ³ / ₄ 842 (900-2 ³ / ₄)	1520-3 842 (900-3)
HUKDO FIX MINIMUMS					
S-26	1080- ³ / ₄ 428 (500- ³ / ₄)				
 CIRCLING	1120-1 442 (500-1)	1160-1 482 (500-1)	1520-2 ¹ / ₂ 842 (900-2 ¹ / ₂)	1520-2 ³ / ₄ 842 (900-2 ³ / ₄)	1520-3 842 (900-3)