

WAAS CH <b>65631</b> <b>W13A</b>	APP CRS <b>136°</b>	Rwy Idg <b>4498</b> TDZE <b>2130</b> Apt Elev <b>2131</b>
--	------------------------	---

# RNAV (GPS) RWY 13


KEARNEY RGNL (E.A.R.)

RNP APCH.

**⚠** Baro-VNAV and VDP NA when using Holdrege altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. When local altimeter setting not received, use Holdrege altimeter setting: increase LPV DA to 2407 feet and all Cats visibility 1/8 SM; increase LNAV/VNAV DA to 2457 feet and all Cats visibility 3/8 SM and all MDAs 80 feet; increase visibility LNAV and Circling Cat C 1/8 SM.


MISSED APPROACH: Climb to 4300 direct VIGXI and on track 070° to LENIY and hold.

AWOS-3PT <b>123.875</b>	MINNEAPOLIS CENTER <b>119.4 278.8</b>	UNICOM <b>123.0 (CTAF) 1</b>
----------------------------	--	---------------------------------

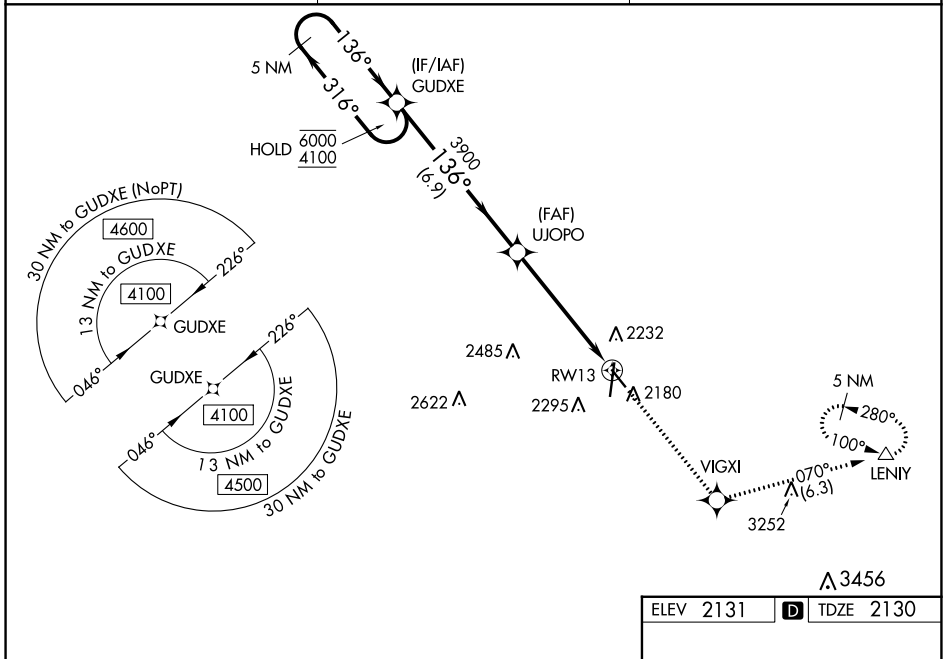


NC-2, 31 OCT 2024 to 28 NOV 2024

NC-2, 31 OCT 2024 to 28 NOV 2024

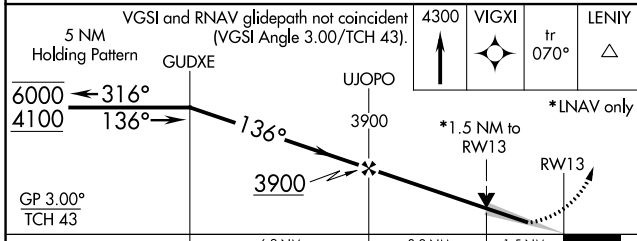

ELEV 2131	<b>D</b> TDZE 2130
-----------	--------------------

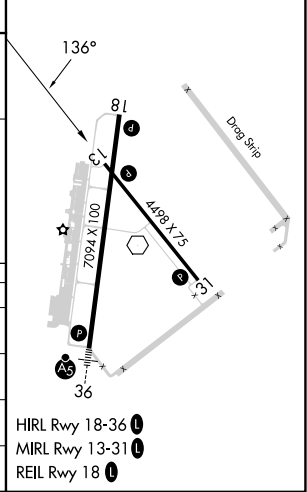

CATEGORY	A	B	C	D
LPV DA	2330-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	2380-3/4	250 (300-3/4)		NA
LNAV MDA	2720-1	590 (600-1)	2720-1 3/4 590 (600-1 3/4)	NA
<b>C</b> CIRCLING	2720-1	589 (600-1)	2720-1 3/4 589 (600-1 3/4)	NA