

LOC/DME I-CER 111.15 Chan 48(Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev	9001 90 96
----------------------------------------------	------------------------	-----------------------------	---------------------------------------

ILS or LOC RWY 35R

ORLANDO INTL (MCO)


From HAHNA: RNAV 1-DME/DME/IRU or GPS required.
Aircraft not DME/DME/IRU or GPS equipped-RADAR required for procedure entry.
DME or RADAR required for LOC only.

Simultaneous approach authorized. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights. For inop ALS, increase S-LOC 35R Cats C/D visibility to RVR 5500. When using alternate missed approach, simultaneous approach NA.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 on ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (Rwys 17L-35R, 17R-35L) 124.3 253.5 (Rwys 18L-36R, 18R-36L)	GND CON 126.4 (East) 121.8 (West)	CLNC DEL 134.7 341.7	CPDLC
---------------------------------------------------	---------------------------------------	------------------------------------------------------------------------------------------------------------	-------------------------------------------------------	------------------------------------------	-------

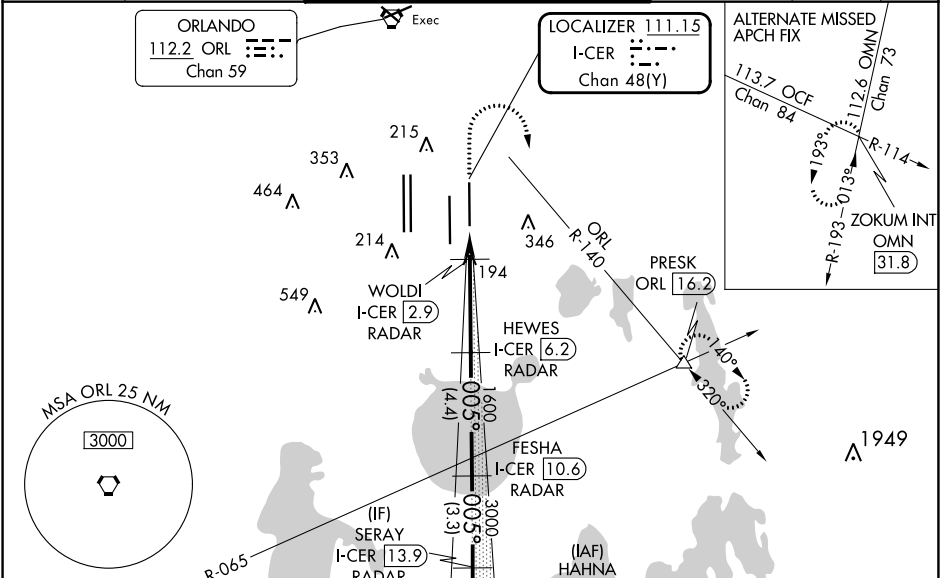

ELEV 96 TDZE 90

500 3000 PRESK

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

CRUSE I-CER 17.1 RADAR

SERAY I-CER 13.9 RADAR



FESHA I-CER 10.6 RADAR

HEWES I-CER 6.2 RADAR

WORLD I-CER 2.9 RADAR

I-CER 1.7

GS 3.00° TCH 55

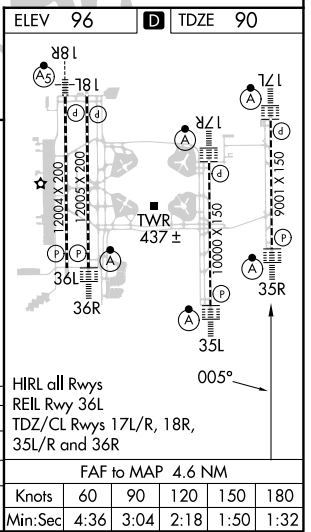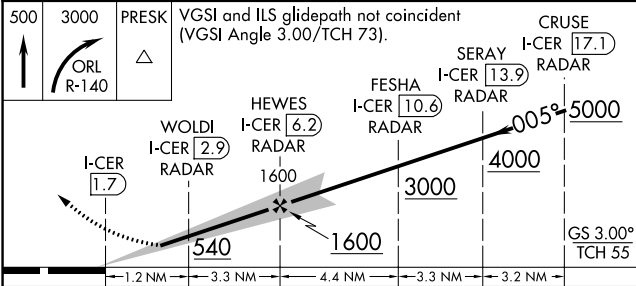

CATEGORY	A	B	C	D
S-ILS 35R	290/18 200 (200-½)			
S-LOC 35R	460/24	370 (400-½)	460/35	370 (400-¾)
CRILING	740-1	644 (700-1)	740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 31 OCT 2024 to 28 NOV 2024

SE-3, 31 OCT 2024 to 28 NOV 2024