

WAAS CH 82313 W36B	APP CRS 005°	Rwy Idg 11621 TDZE 93 Apt Elev 96
--	------------------------	--


RNAV (GPS) RWY 36L

ORLANDO INTL (MCO)


RNP APCH. MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DNMOR and hold, continue climb-in-hold to 3000.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C.

D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (Rwys 17L-35R, 17R-35L) 124.3 253.5 (Rwys 18L-36R, 18R-36L)	GND CON 126.4 (East) 121.8 (West)	CLNC DEL 134.7 341.7	CPDLC
---	---------------------------------------	--	---	--	-------

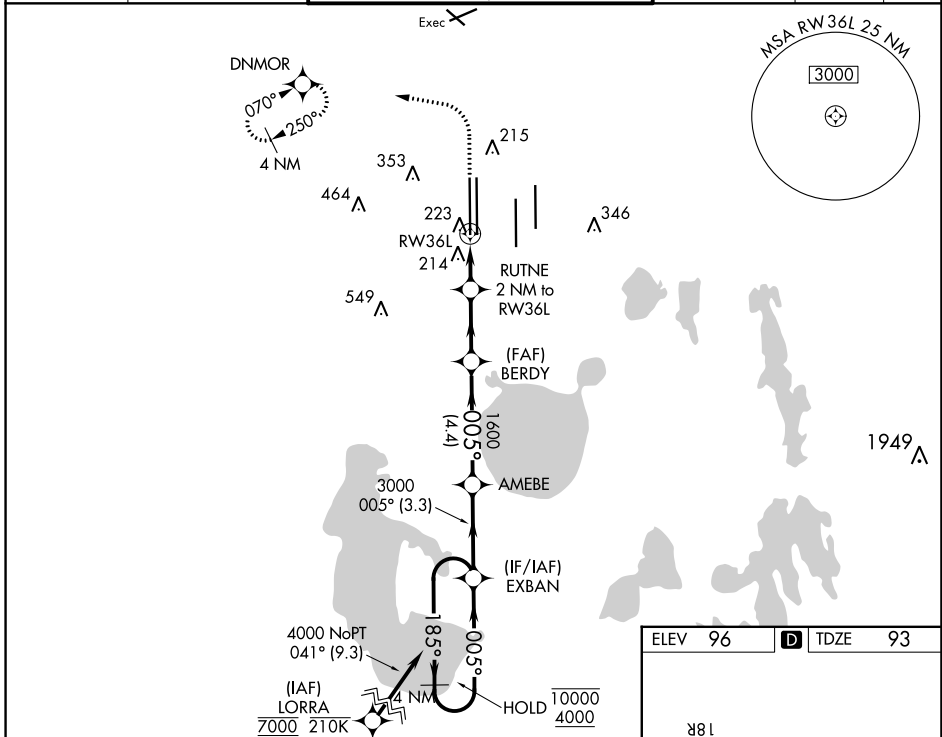

500	3000	DNMOR	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69).			
↑		↙	↖	↗	↘	↙
1 NM		1 NM	2.6 NM	4.4 NM	3.3 NM	4 NM
RWY 36L		RWY 36L	RUTNE	BERDY	AMEBE	EXBAN
1 NM to RWY 36L		2 NM to RWY 36L	1600	1600	10000	4000
005°		005°	185°	005°	005°	005°
GP 3.00°		TCH 55				
CATEGORY	A	B	C	D		
LPV DA	293/40		200 (200-¾)			
LNAV/VNAV DA	406/45		313 (400-¾)			
LNAV MDA	480/55	387 (400-1)	480/60	387 (400-1½)		
CIRCLING	740-1	644 (700-1)	740-1¾	644 (700-1¾)	740-2	644 (700-2)

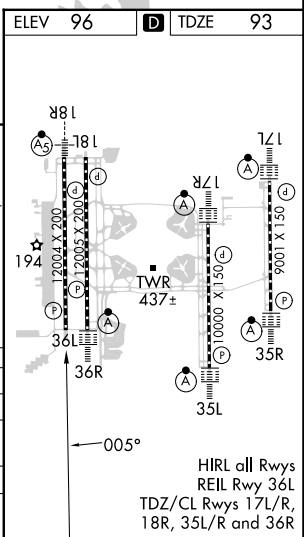

SE-3, 08 AUG 2024 to 05 SEP 2024

SE-3, 08 AUG 2024 to 05 SEP 2024