


LOC I-BAK <b>110.7</b>	APP CRS <b>228°</b>	Rwy Idg TDZE Apt Elev	<b>6401</b> <b>656</b> <b>656</b>
---------------------------	------------------------	-----------------------------	---

# ILS or LOC RWY 23

COLUMBUS MUNI (BAK)

ADF or RADAR required.		MALSRR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct CLIFS LOM and hold, continue climb-in hold to 2300.	
NA For inoperative ALS increase S-LOC 23 Cats C/D visibility to 1 1/8 SM.				

AWOS-3 <b>119.75</b>	INDIANAPOLIS APP CON <b>134.85 317.8</b>	COLUMBUS TOWER ★ <b>118.6 (CTAF) 0</b>	GND CON <b>121.6</b>	CLNC DEL <b>134.85</b>	UNICOM <b>122.95</b>
-------------------------	---	---	-------------------------	---------------------------	-------------------------

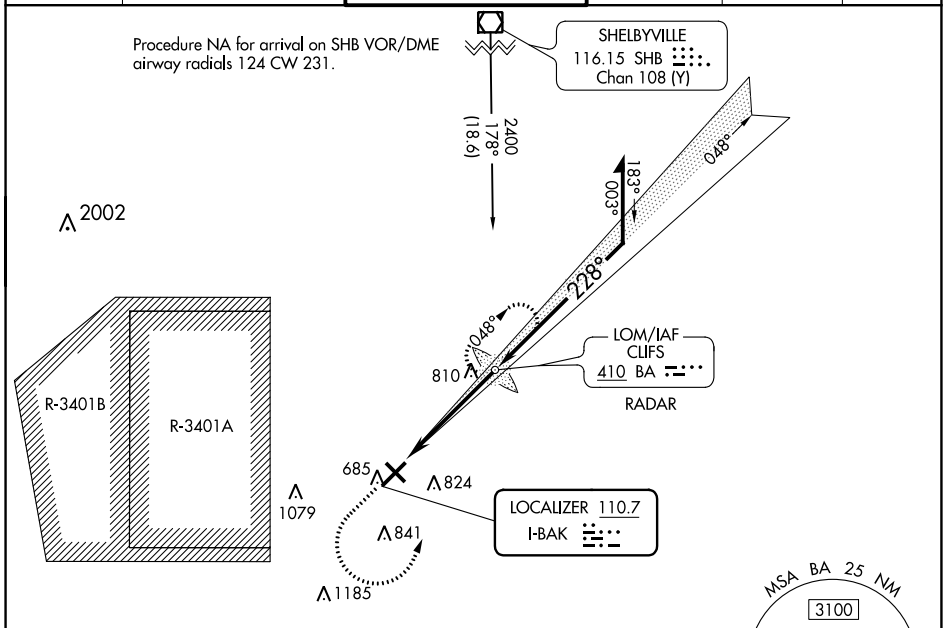


ELEV 656	<b>D</b>	TDZE 656
----------	----------	----------

MIRL Rwy 14-32  
HIRL Rwy 5-23  
REIL Rwys 5, 14, and 32

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

**C** CIRCLING

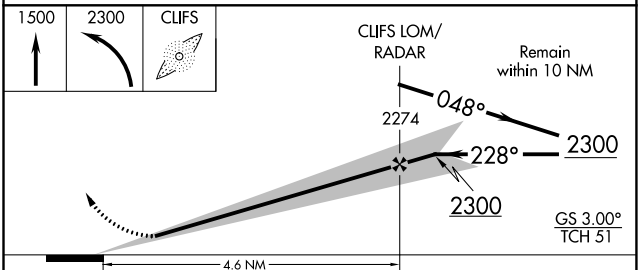

CATEGORY	A	B	C	D
S-ILS 23	906-1/2 250 (300-1/2)			
S-LOC 23	1060-1/2 404 (500-1/2)	1060-3/4 404 (500-3/4)		
<b>C</b> CIRCLING	1140-1 484 (500-1)	1200-1 544 (600-1)	1200-1 3/4 544 (600-1 3/4)	1400-2 1/4 744 (800-2 1/4)

EC-2, 08 AUG 2024 to 05 SEP 2024

EC-2, 08 AUG 2024 to 05 SEP 2024