




WAAS CH <b>45909</b> <b>W25A</b>	APP CRS <b>251°</b>	Rwy Idg <b>5371</b> TDZE <b>3732</b> Apt Elev <b>3732</b>
--	------------------------	---

# RNAV (GPS) RWY 25

GOODING MUNI (GNG)

RNP APCH.	MISSED APPROACH: Climb to 5900 direct FEVDO and hold.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.</p>	

AWOS-3PT <b>124.175</b>	SALT LAKE CENTER <b>118.05 363.0</b>	UNICOM <b>122.8 (CTAF) 0*</b>
----------------------------	---	----------------------------------

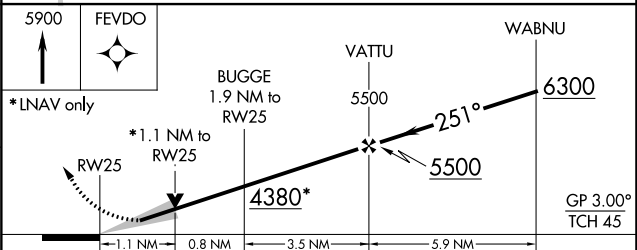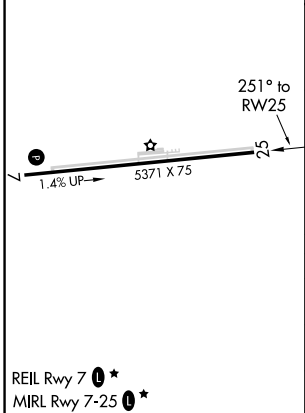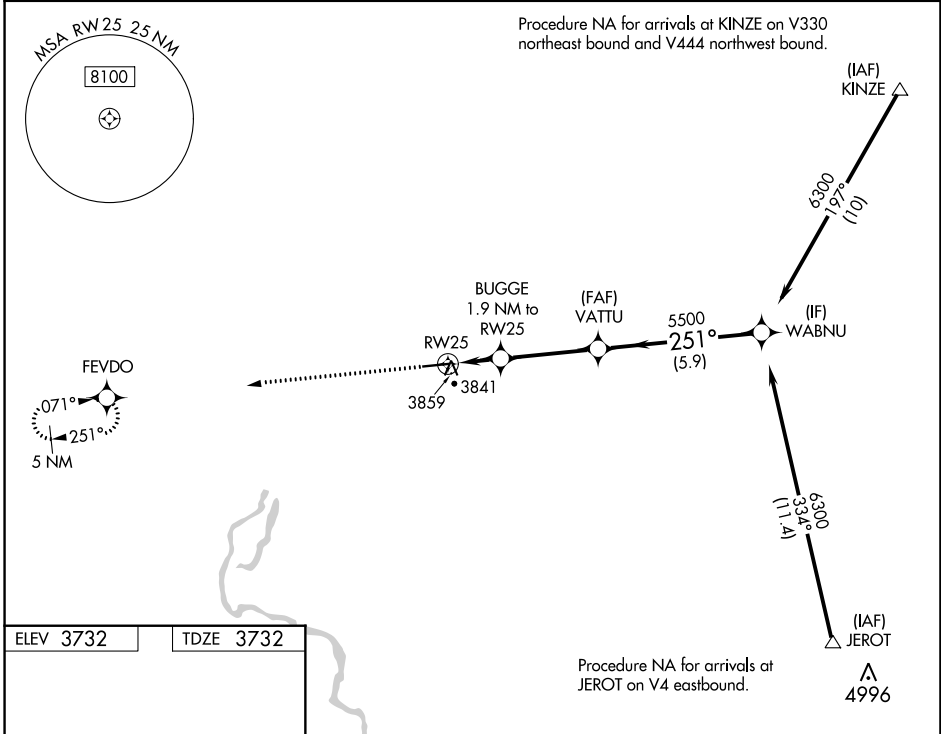

CATEGORY	A	B	C	D
LPV DA		3982- <sup>3</sup> / <sub>4</sub>	250 (300- <sup>3</sup> / <sub>4</sub> )	
LNAV/VNAV DA		4020- <sup>7</sup> / <sub>8</sub>	288 (300- <sup>7</sup> / <sub>8</sub> )	
LNAV MDA	4120-1	388 (400-1)	4120-1 <sup>1</sup> / <sub>8</sub>	388 (400-1 <sup>1</sup> / <sub>8</sub> )